

JUN 4 - 1940



ERIE

LIGHTING GLASSWARE

ERIE GLASS AND MFG. CO. PITTSBURGH, PA.



Digitized by the Internet Archive
in 2020 with funding from
Columbia University Libraries

<https://archive.org/details/illuminatingglas00erie>

Erie Glass and Manufacturing Company

991 Union Trust Building
PITTSBURGH, PENNSYLVANIA

CHICAGO OFFICE
1422 Merchandise Mart

NEW YORK OFFICE
200 Fifth Avenue

CATALOGUE No. 40

West Coast
SAN FRANCISCO OFFICE
726 Mission Street
LOS ANGELES OFFICE
825 Third Street

Illuminating Glassware



When planning a new home, office, business establishment, etc., or renovating the present one, nothing is more deserving of serious thought than the ILLUMINATING UNITS which will be used.

SIGHT IS PRICELESS—GOOD LIGHT ESSENTIAL TO GOOD SIGHT
and

THE PROPER ILLUMINATING UNITS ESSENTIAL FOR BOTH

Many years of experience gained by serving the foremost "consumers" has gained for us an enviable reputation as designers and producers of only the finest in ILLUMINATING GLASSWARE.

On the pages which follow are to be found "ERIE UNITS" suitable for every possible use in the home, office-building, store, school, church, hospital and other public buildings. Many of these units have already gained much popularity and are to be found in many exclusive homes and business establishments.

Our factory facilities, expert designers, sales engineers and other trained personnel are at your service, ready to assist you with any "Lighting" problem which you may have.

Quality :: Efficiency :: Sales Appeal



For LIST PRICES and INFORMATION REGARDING ORDERING
Turn to Pages 52, 53, 54, 55 and 56

The "Erie" 9000 Series

New "Swedish Modern" Design

Some of the light reflects from ceiling for Semi-Indirect effect. Balance is diffused uniformly through the smooth opal glass with no bright spots. Dark lines accentuate the spherical design creating an effect pleasing to the eyes. For this reason, these units are ideal for

OFFICES or OFFICE BUILDINGS, BANKS, SCHOOLS, CHURCHES, STORES, etc.


For those who prefer undecorated units, we offer those shown on page 3 which are made of highest quality OPAL glass. The 16" size is especially adaptable for schools and churches.

Smaller size units to match are illustrated on pages 6 and 7.




NOTE: For information regarding size, packing, weight, etc., see pages 3 and 4.


Commercial Opal Glassware

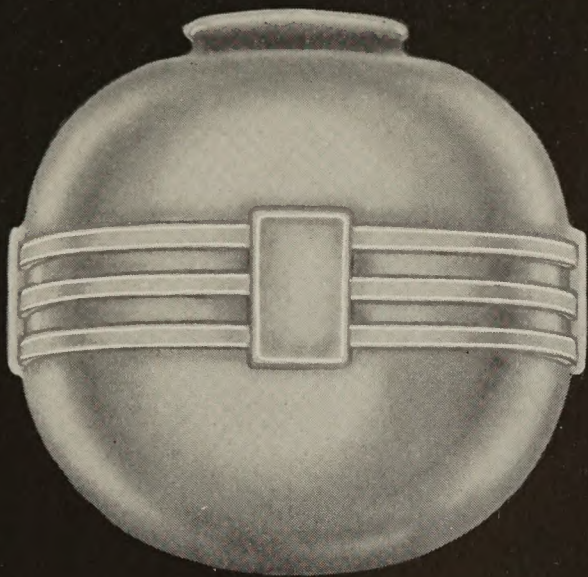

No. 9012

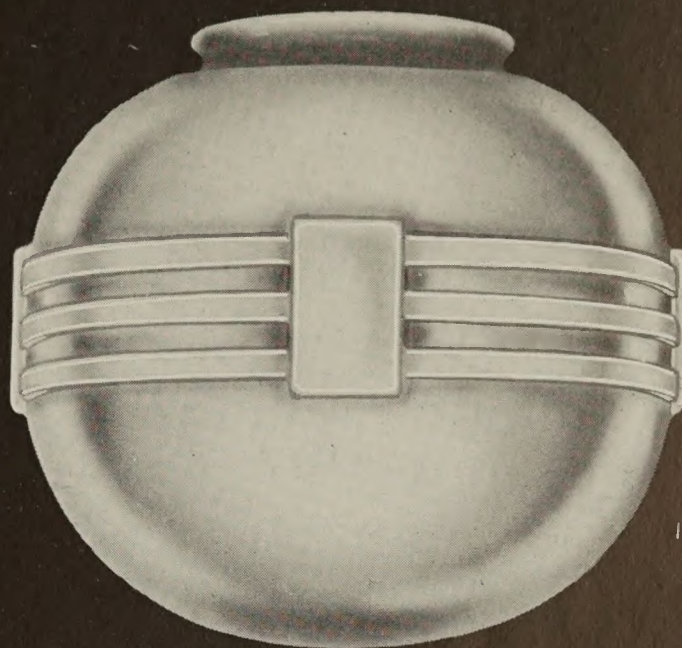

No. 9014

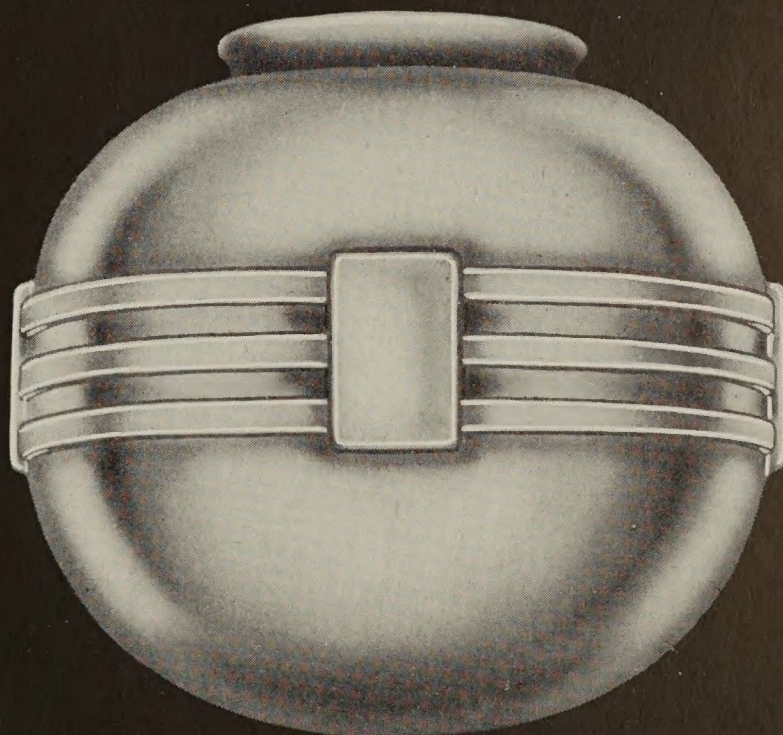

No. 9016

No. 9012 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	10½"	2	15 lbs.	100

No. 9014 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	12½"	2	16 lbs.	150


No. 9016 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	14¼"	1	11 lbs.	200


Commercial and Residential Decorated Glassware



No. 9012-735

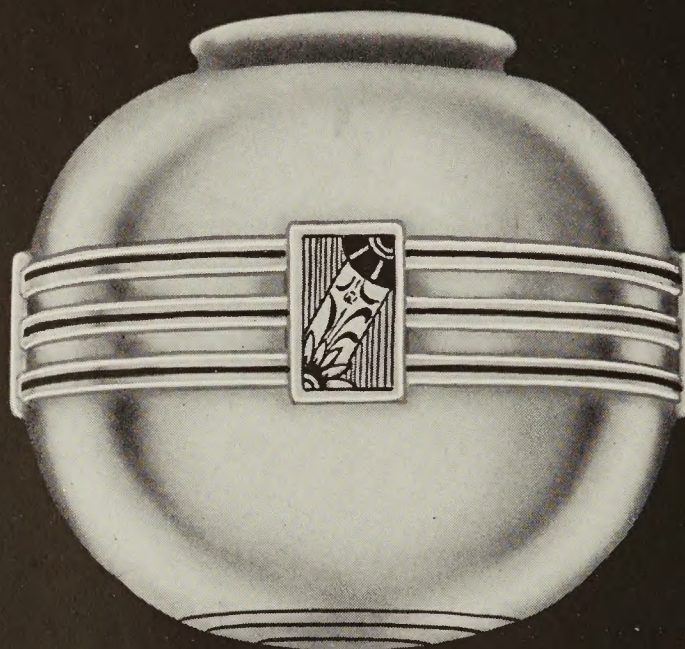

No. 9014-735

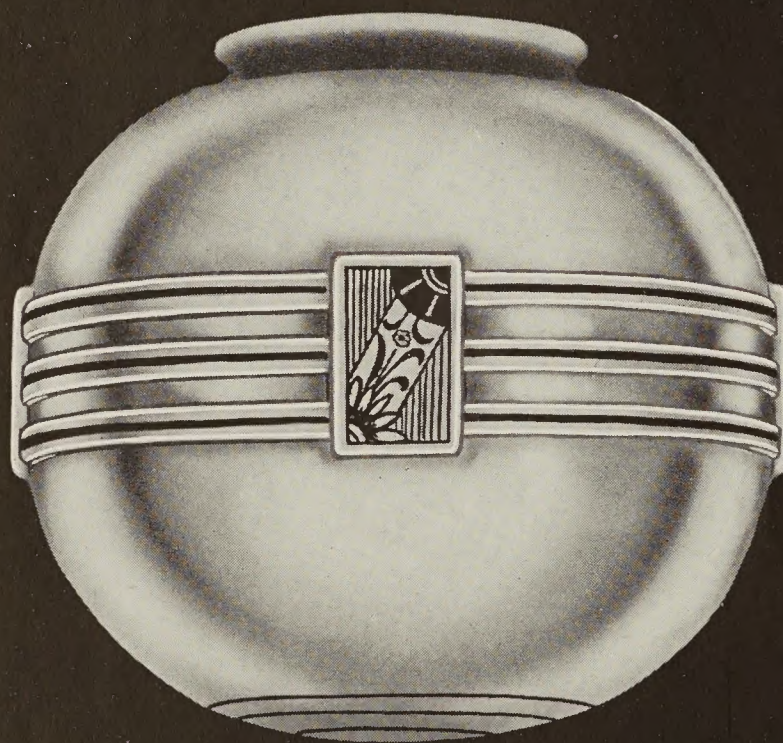

No. 9016-735

No. 9012-735 BLACK DECORATION

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	10½"	1	7 lbs.	100

No. 9014-735 BLACK DECORATION

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	12½"	1	8 lbs.	150

No. 9016-735 BLACK DECORATION

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	14¼"	1	11 lbs.	200

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 149047

ORDER NO. 73122-S

PLATE NO. 33211

CANDLEPOWER DISTRIBUTION

NO. 9014 ENCLOSING GLASS GLOBE*

Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications

Rendered to Erie Sales and Manufacturing Company


Globes - 25 Submitted; 25
Inspected and
Weighed; 6 Tested.
Light output range
81% to 81.5%.
Average 81%.

Lamp - 200 Watts; 115
Volts; 3640 Lumens;
PS30 Inside-Frosted
Bulb; C-9 Filament;
Medium Base;
General Service.

Surface covering globe
opening; reflection factor
0.40.

White Diffusing Glass

Weight of Test Sample - 78 ozs

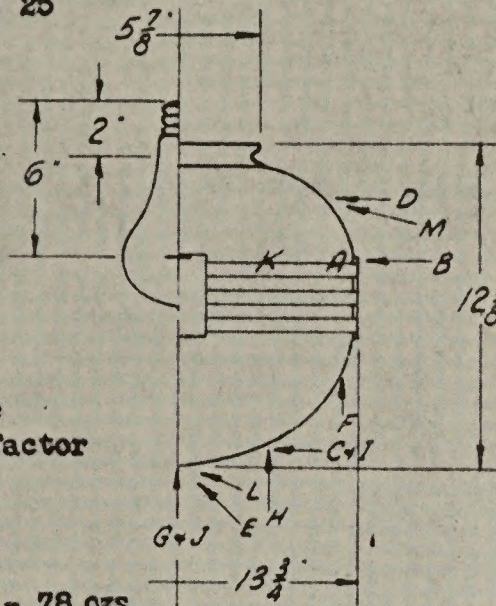

LUMINAIRE DISTRIBUTION DATA					
Mean Vertical					
MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° ITN.	204		90° HOR.	232	
175°	204	19	85°	234	255
165°	206	58	75°	239	253
155°	210	97	65°	246	244
145°	211	132	55°	253	227
135°	215	166	45°	259	200
125°	219	197	35°	264	166
115°	224	222	25°	268	124
105°	227	240	15°	273	77
95°	230	251	5°	275	26
			0° NADIR	276	

LIGHT FLUX VALUES				
ZONE	LUMENS		PER CENT TOTAL LUMENS BARE LAMP	PER CENT LIGHT OUTPUT
	LAMP	LUMINAIRE		
0°-60°	975	820	22.5	81
0°-90°	1861	1572	43	
90°-180°	1779	1382	38	
0°-180°	3640	2954	81	

LUMINAIRE BRIGHTNESS

CANDLEPOWER PER SQUARE INCH

THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW

LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP. PER SQ. IN.	1.5	1.8	1.6	2.0	2.1	1.6	2.1	1.8	1.6	2.1	1.7	1.8	2.0

*E.T.L. Identification No. 9810

TESTED BY *HSC*

PLOTTED BY *[Signature]*

COMPUTED BY *[Signature]*

CHECKED BY *[Signature]*


ISSUED

July 24, 1939.


APPROVED BY

William T. Chubb
ENGINEER IN CHARGE OF PHOTOMETRY


C. F. Horn
IN CHARGE OF TEST

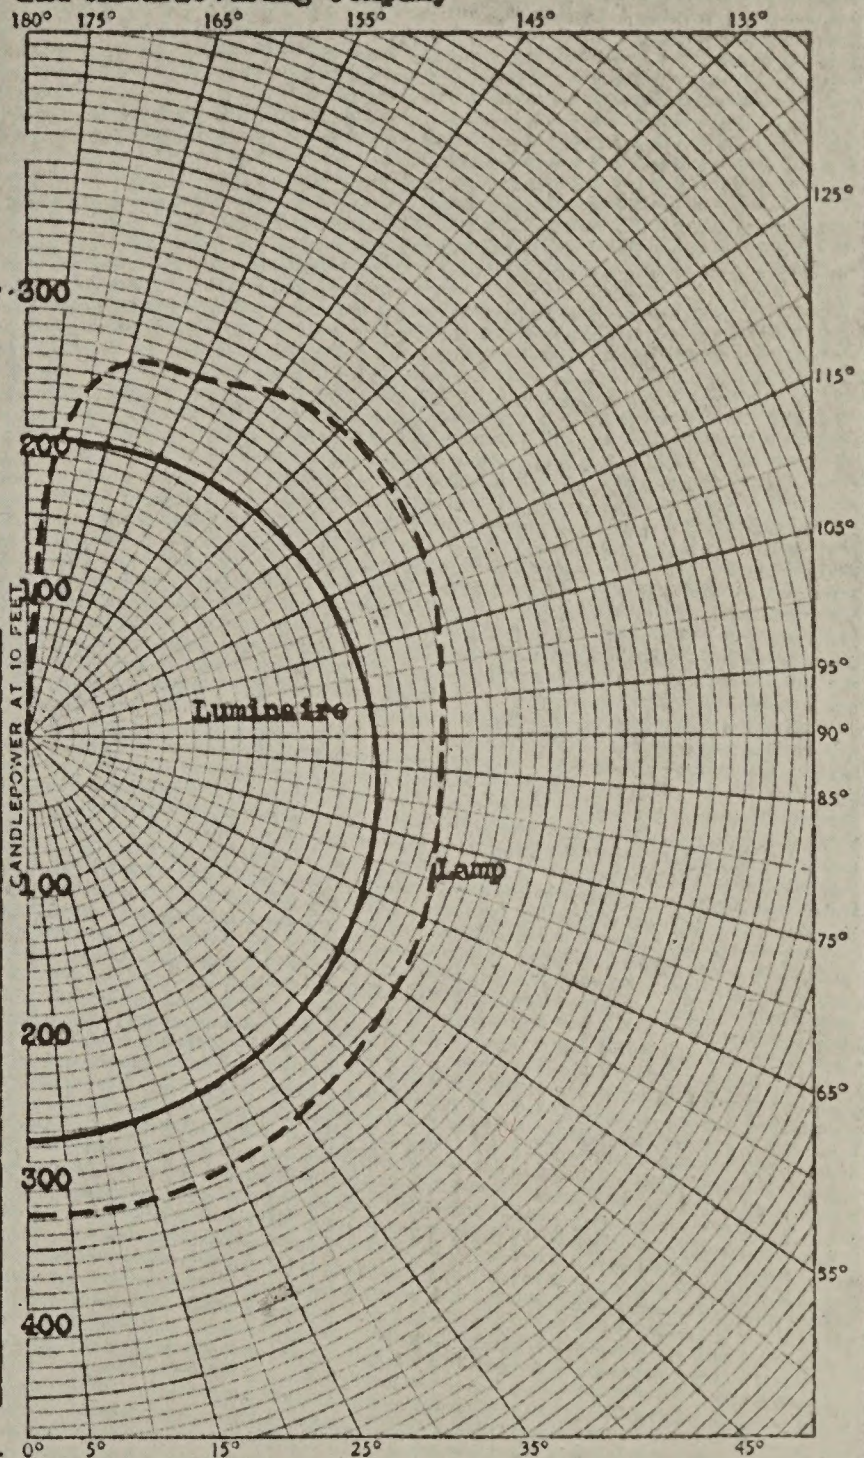


Commercial and Residential Decorated Glassware

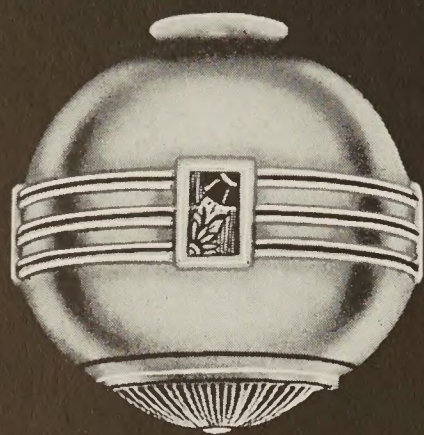


No. 9006-735

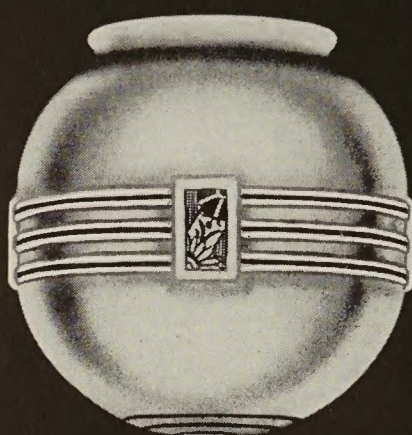


No. 9007-735

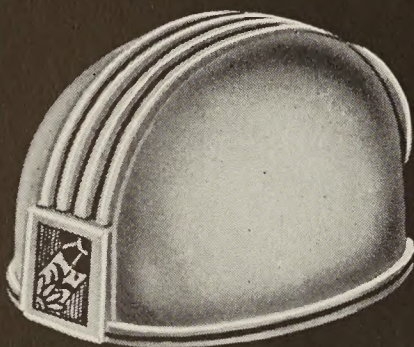

No. 9001-735

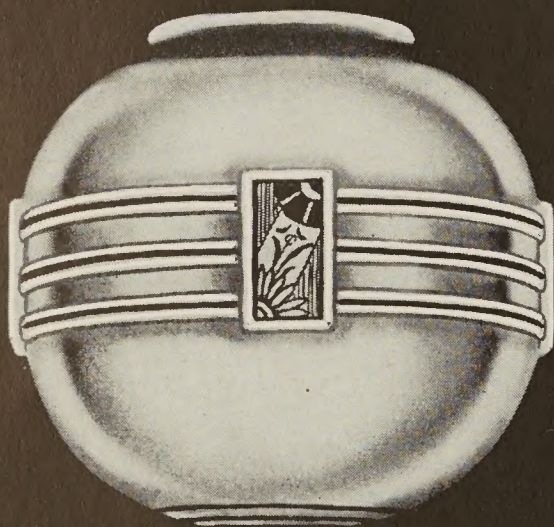

No. 9009-735

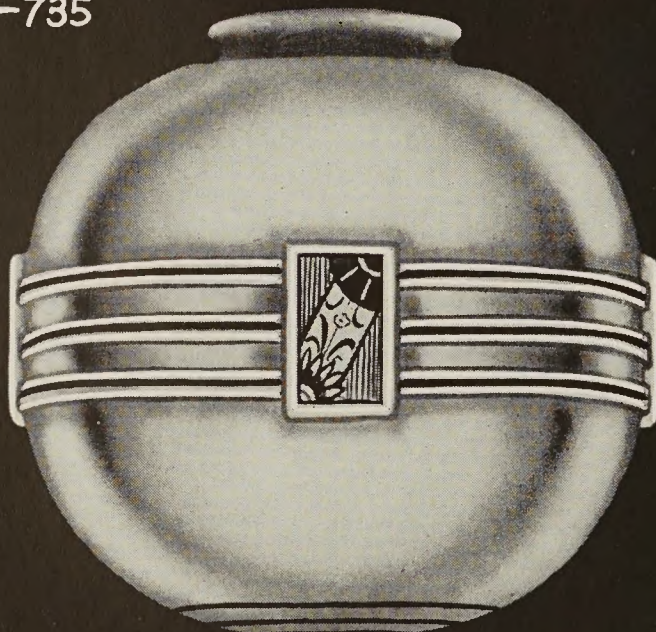

No. 9010-735

BEAUTIFUL,
MATCHED,
DECORATED,
SPHERICAL
DESIGN.
For the HOME,
HOTEL or
HOSPITAL.
The Black Lines
and
DECORATIONS
add contrast
interest.
No. 9006-735
has a
REMOVABLE
RIBBED
CRYSTAL
BOTTOM DISH
which tends to
shed more light
below where
needed OVER
SINK, in
SMALL
KITCHEN
or BATH.

No. 9006-735 BLACK DECORATION
REMOVABLE CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 3/8"	2 1/4"	6"	12	22 lbs.	60

No. 9007-735 BLACK DECORATION

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 3/8"	4"	6 1/4"	12	20 lbs.	60

No. 9001-735 BLACK DECORATION

Depth	Fitter	Length	Standard Package	Weight Per Carton
3"	2 1/4"	5 1/2"	24	25 lbs.

No. 9009-735 BLACK DECORATION


Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8 1/2"	4"	7 1/4"	12	30 lbs.	75

No. 9010-735 BLACK DECORATION


Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
10"	4"	9 1/4"	4	15 lbs.	100

Commercial and Residential Opal Glassware


These units are the same design as those to the left except that these do not have the decorations. Made of smooth, even texture **OPAL GLASS**, these **UNITS ARE IDEAL** for those who prefer plain fixtures. These units give forth **SOFT, DIFFUSED, PLEASING LIGHT WITHOUT SHADOWS** or annoying glare. Using porcelain holders with these units makes an ideal combination.

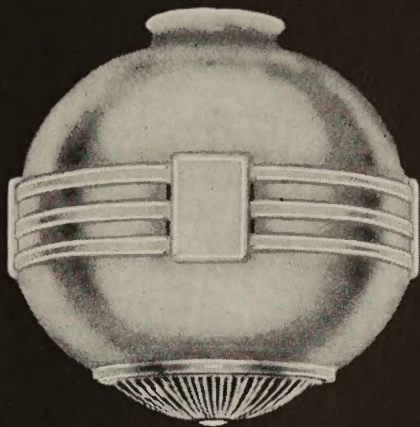


No. 9006

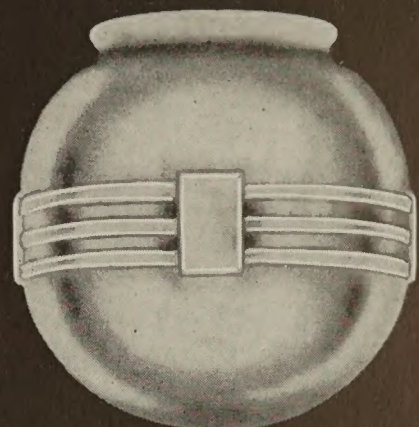


No. 9007

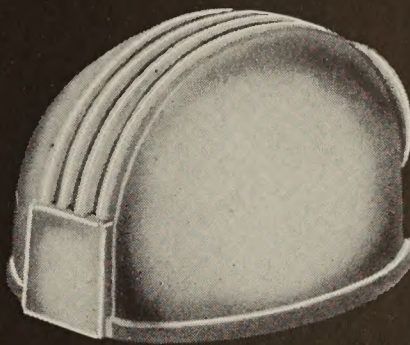

No. 9001

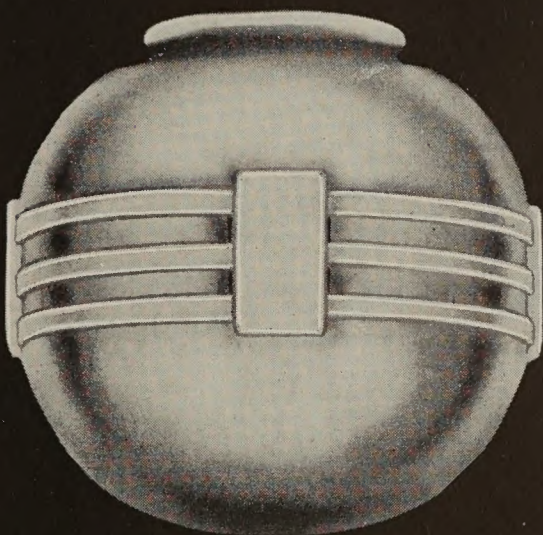

No. 9009

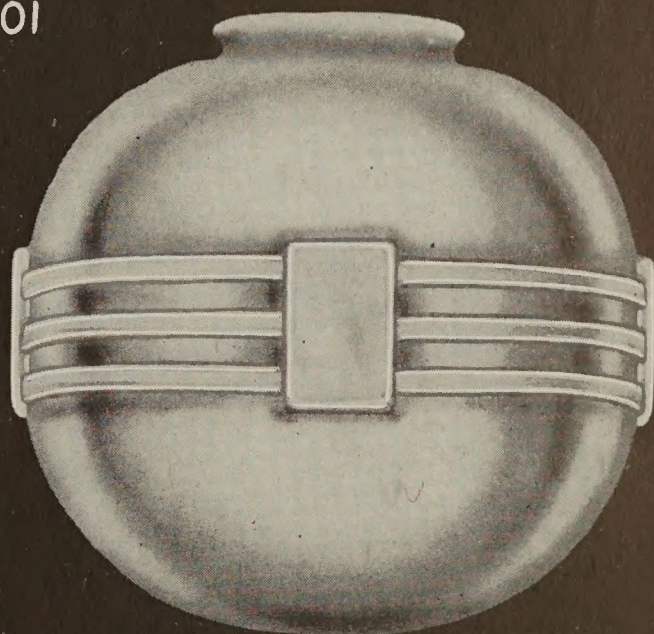

No. 9010

No. 9006 OPAL—REMOVABLE CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	6"	12	20 lbs.	60

No. 9007 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 $\frac{3}{8}$ "	4"	6 $\frac{1}{4}$ "	12	20 lbs.	60

No. 9001 OPAL

Depth	Fitter	Length	Standard Package	Weight Per Carton
3"	2 $\frac{1}{4}$ "	5 $\frac{1}{2}$ "	24	25 lbs.

No. 9009 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8 $\frac{1}{2}$ "	4"	7 $\frac{1}{4}$ "	12	30 lbs.	75

No. 9010 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
10"	4"	9 $\frac{1}{4}$ "	4	15 lbs.	100

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 149049

ORDER NO. 73122-8

PLATE NO. 33213

CANDLEPOWER DISTRIBUTION NO. 314 ENCLOSING GLASS GLOBE*


Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications

Rendered to Erie Sales and Manufacturing Company

Globes - 26 Submitted; 25 Inspected and Weighed;
6 Tested. Light output range 80.5% to 81.5%.
Average 81%.

Lamp - 200 Watts; 115 Volts;
3640 Lumens; PS30
Inside-Frosted
Bulb; C-9 Filament;
Medium Base;
General Service.

Surface covering
globe opening; reflection
factor 0.40.

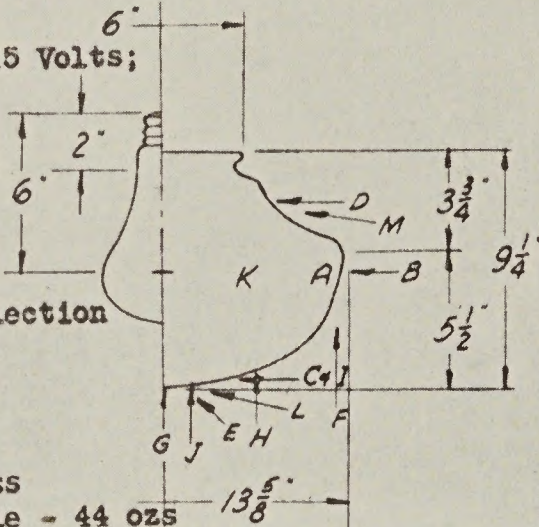

White Diffusing Glass

Weight of Test Sample - 44 ozs

LUMINAIRE DISTRIBUTION DATA					
Mean Vertical					
MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° ILL.	247		90° HOR.	191	
175°	237	23	85°	199	217
165°	232	66	75°	218	231
155°	230	106	65°	243	241
145°	215	135	55°	278	249
135°	206	159	45°	313	242
125°	198	178	35°	339	213
115°	192	191	25°	357	165
105°	185	196	15°	369	104
95°	187	204	5°	377	36
			0° NAIR	379	

LIGHT FLUX VALUES				
ZONE	LUMENS		PER CENT TOTAL LUMENS BARE LAMP	PER CENT LIGHT OUTPUT
	LAMP	LUMINAIRE		
0°-60°	975	1009	27.5	81
0°-90°	1861	1698	46.5	
90°-180°	1779	1258	34.5	
0°-180°	3640	2956	81	

LUMINAIRE BRIGHTNESS

CANDLEPOWER PER SQUARE INCH
THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW

LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP. PER SQ. IN.	1.8	2.2	2.4	2.9	3.8	1.9	3.6	3.0	2.4	3.8	2.1	3.2	2.9

*E.T.L. Identification No. 9819


TESTED BY NJC PLOTTED BY ME COMPUTED BY EX CHECKED BY me ISSUED July 24, 1939.

APPROVED BY

William Threl
ENGINEER IN CHARGE OF PHOTOMETRY

C. T. Horn
IN CHARGE OF TEST

220-B

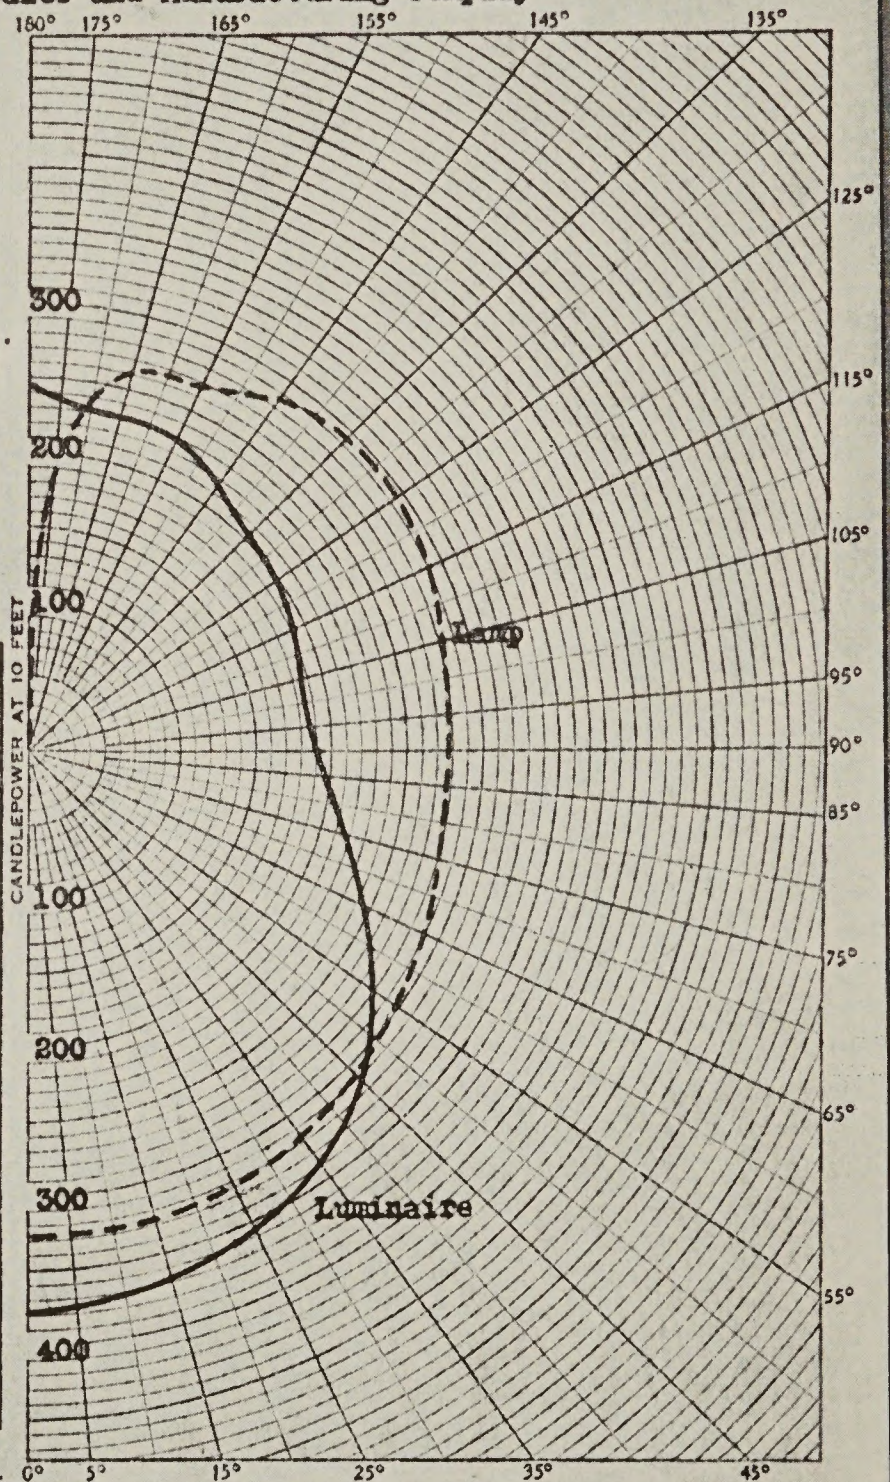

The "Erie" 300 Series



For every type of competitive work,
we recommend this line of OPAL
UNITS.

GOOD LIGHT, with NO GLARE

These units are ideal
for
RESIDENTIAL
as well as
COMMERCIAL
use.



NOTE: Metal holders shown above are merely for illustrative purposes and are not furnished by us.
FOR INFORMATION REGARDING SIZES, PACKING, WEIGHTS, ETC., TURN TO PAGE 10.

Commercial and Residential Opal Glassware



No. 320					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
10"	4"	7 1/4"	8	22 lbs.	100

No. 312					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	7 11/16"	4	18 lbs.	150


No. 300					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8 11/16"	4"	6 3/4"	12	28 lbs.	100

No. 314					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	8 3/4"	2	12 lbs.	200


No. 316					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	9 3/4"	1	8 lbs.	300

The "Venetian Blind" Series


CRYSTAL
CENTER
AND
BOTTOM
—
OPAL
AND
OPAL-
DECORATED
GLASSWARE

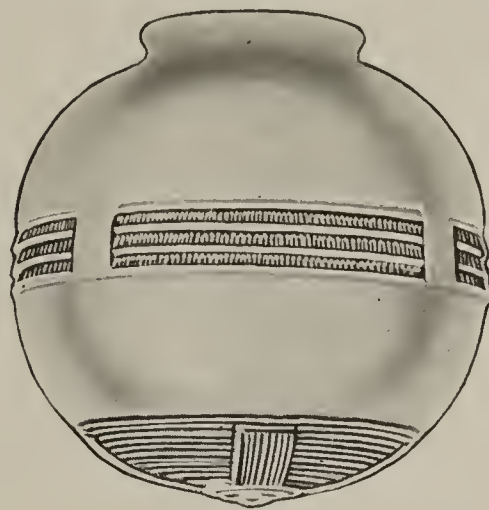


No. 1007

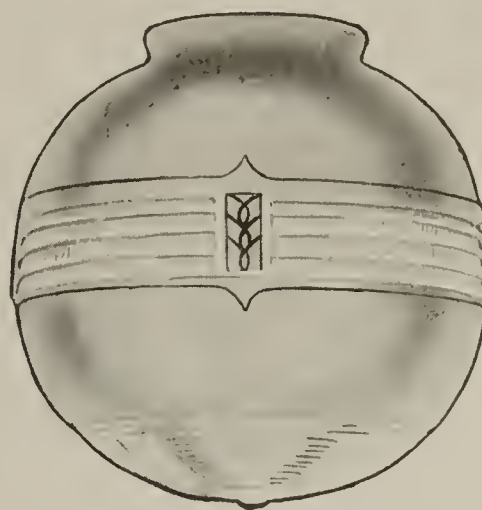


No. 1008-756

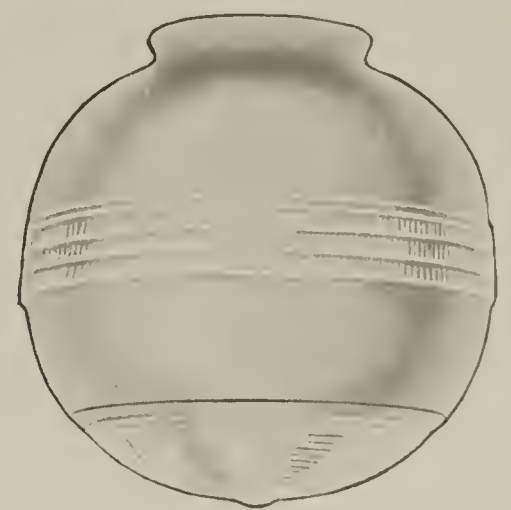

No. 1008

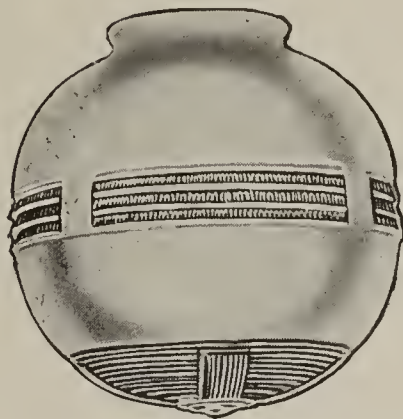

No. 1009

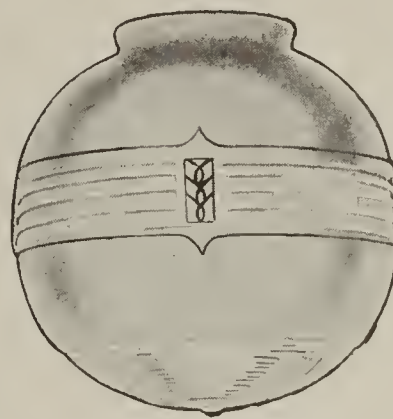

No. 1010-756



No. 1010

A VERY NOVEL AND EFFECTIVE DESIGN


Crystal center and bottom are ribbed to direct more light below WITHOUT UN-DUE GLARE. The ribbed glass has a prism effect and diverts the rays of light.

The same design is offered in plain opal or decorated.

Your choice of two sizes in any combination.

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Watt Capacity
1007	Crystal Center & Bottom	8 $\frac{3}{8}$ "	4"	8 $\frac{1}{2}$ "	12	30 lbs.	100
1008	Opal	8 $\frac{3}{8}$ "	4"	8 $\frac{1}{2}$ "	12	30 lbs.	100
10008-756	Opal with Black Decoration	8 $\frac{3}{8}$ "	4"	8 $\frac{1}{2}$ "	12	30 lbs.	100
1009	Crystal Center & Bottom	6 $\frac{7}{8}$ "	4"	6 $\frac{7}{8}$ "	12	20 lbs.	60
1010	Opal	6 $\frac{7}{8}$ "	4"	6 $\frac{7}{8}$ "	12	20 lbs.	60
1010-756	Opal with Black Decoration	6 $\frac{7}{8}$ "	4"	6 $\frac{7}{8}$ "	12	20 lbs.	60

The "Erie" 4400 Series

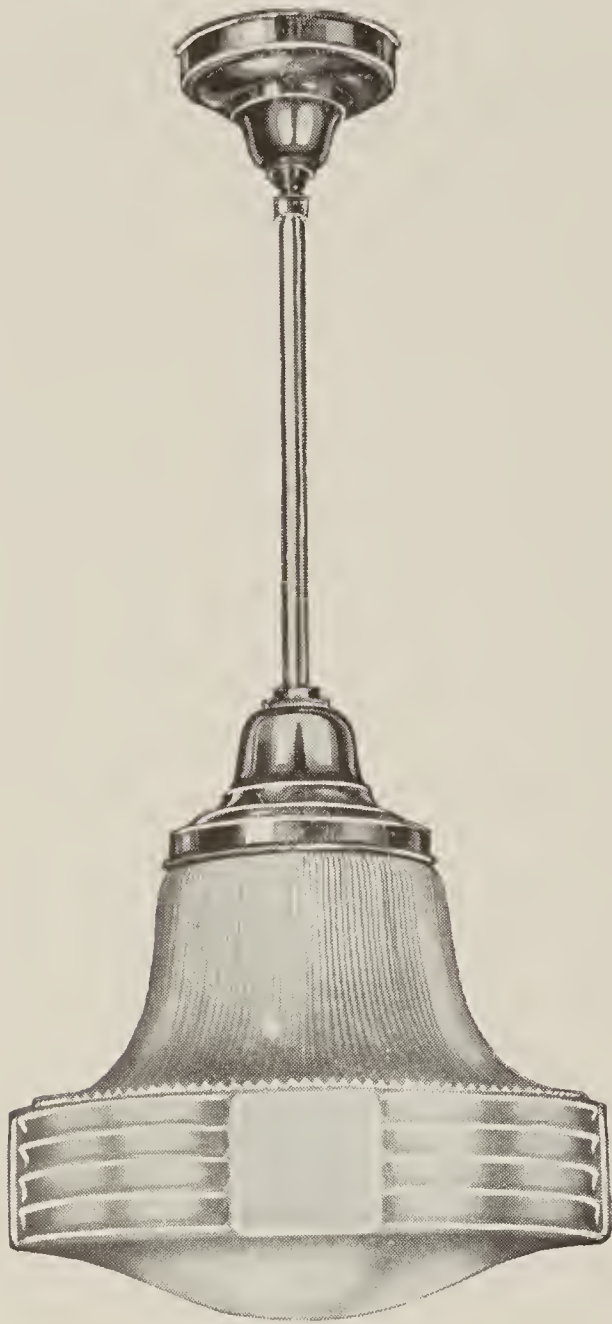


A group of units which continue to enjoy widespread popularity.

The graceful lines of the units and the efficient diffusing medium of the glass, are your customers' assurances of

Good Light Always.

Approved by the
ELECTRICAL TESTING
LABORATORIES, these
units are a welcome addition to any room in which they are hung.

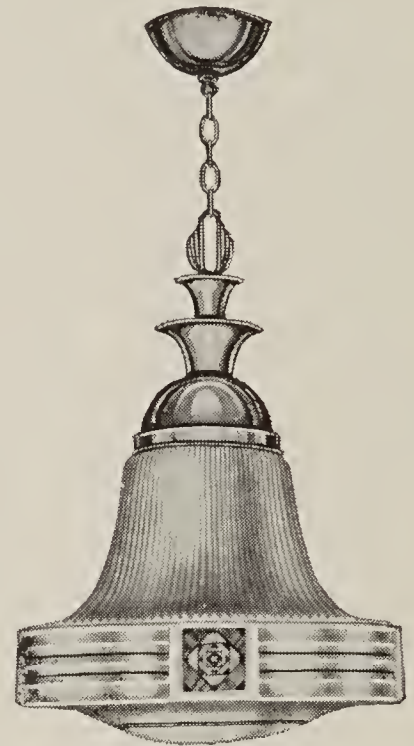

OBTAINABLE WITH CRYSTAL TOP, ALL OPAL or OPAL WITH BLACK DECORATION.

FOR INFORMATION REGARDING SIZES, PACKING, WEIGHT, etc., TURN TO PAGES 13, 14, 15, 16 and 17.

NOTE: Metal holders shown above are merely for illustrative purposes and are not furnished by us.

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 141612

ORDER NO. 65172-S

PLATE NO 29731

CANDLEPOWER DISTRIBUTION

NO. 4414 ENCLOSING GLOBE*

Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications


Rendered to Erie Sales and Manufacturing Company

Globes - 162 Submitted; 25 Inspected and
Weighed; 6 Tested. Weight of Test Sample -
65 oz.

Light output range 77.5
to 81.5%, Average 79%.

Lamp - 200 Watts;
115 Volts; 3640
Lumens; PS30
Inside Frosted
Gas-Filled Bulb;
C-9 Filament;
Medium Base;
General Service.

Surface covering globe
opening; reflection factor
0.40.

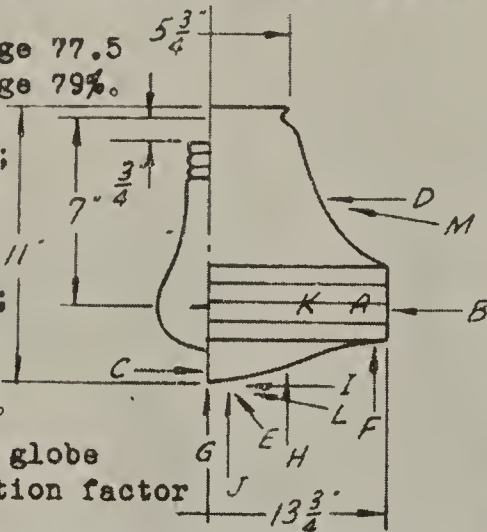

LUMINAIRE DISTRIBUTION DATA


MEAN VERTICAL

MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° IER.	178		90° HOR.	189	
175°	170	16	85°	192	211
165°	183	52	75°	210	222
155°	196	91	65°	237	235
145°	202	127	55°	267	239
135°	209	162	45°	294	228
125°	210	188	35°	318	200
115°	205	203	25°	341	158
105°	194	205	15°	353	100
95°	188	205	5°	357	34
			0° NADIR	358	

LIGHT FLUX VALUES

ZONE	LUMENS		PER CENT TOTAL LUMENS BARE LAMP	PER CENT LIGHT OUTPUT
	LAMP	LUMINAIRE		
0°-60°	993	959	26.5	79
0°-90°	1852	1627	44.5	
90°-180°	1788	1249	34.5	
0°-180°	3640	2876	79	

LUMINAIRE BRIGHTNESS

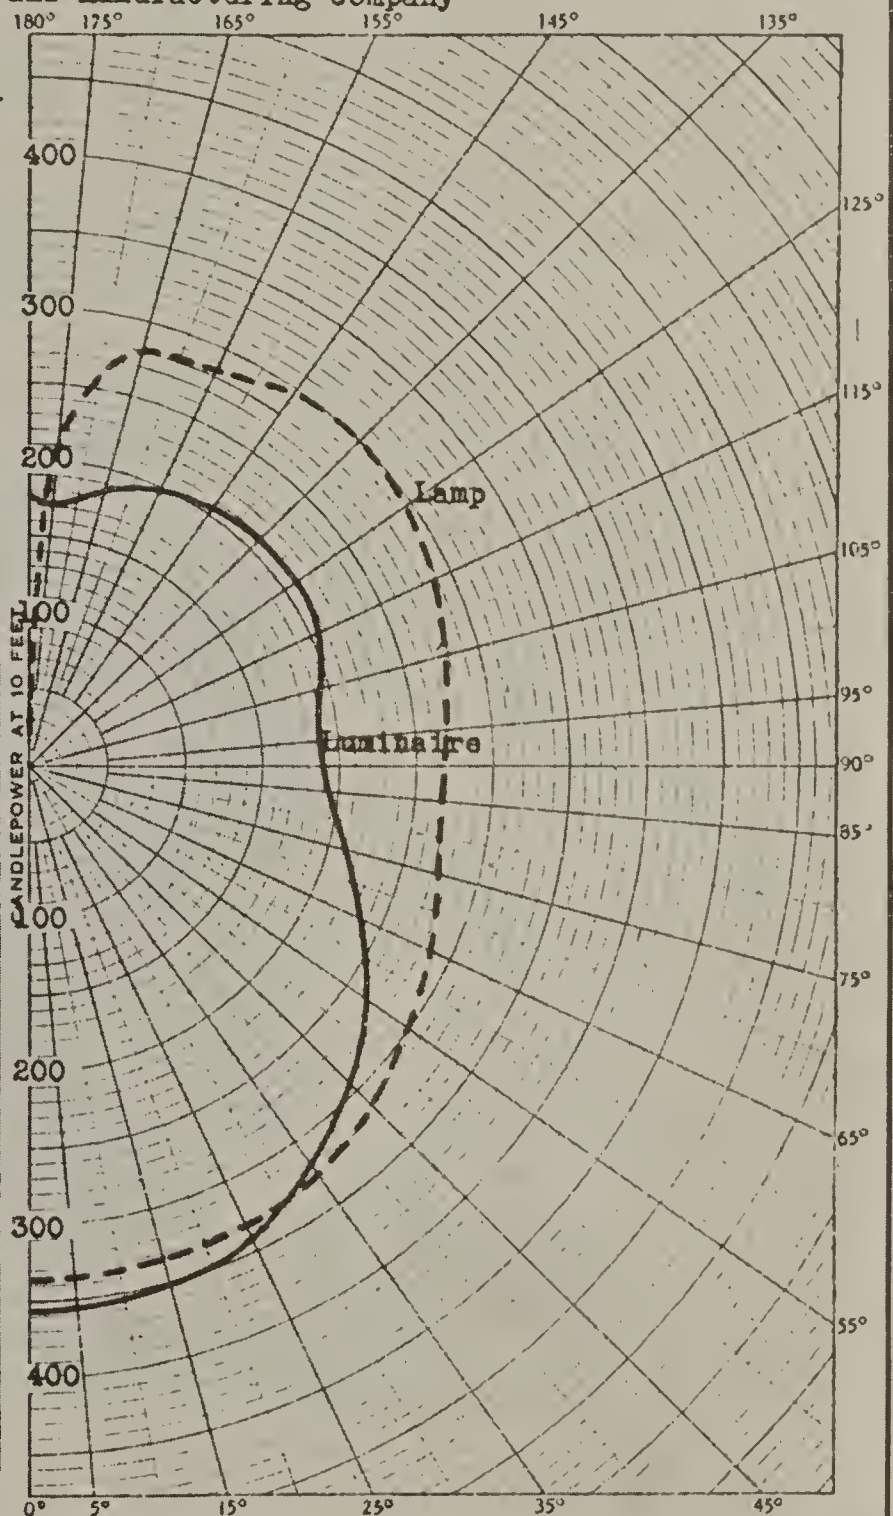

CANDLEPOWER PER SQUARE INCH

THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW

LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP. PER SQ. IN.	1.4	2.2	2.5	2.6	4.2	1.5	4.4	3.5	2.5	4.4	2.1	3.7	2.5


TESTED BY *H.C.* PLOTTED BY *W.L.* E.T.L. Identification No. 7127 COMPUTED BY *W.L.* CHECKED BY *H.C.* ISSUED June 22, 1937.

APPROVED BY

William F. Smith
ENGINEER IN CHARGE OF PHOTOMETRY

C. E. Horn
IN CHARGE OF TEST

Commercial and Residential Opal Glassware

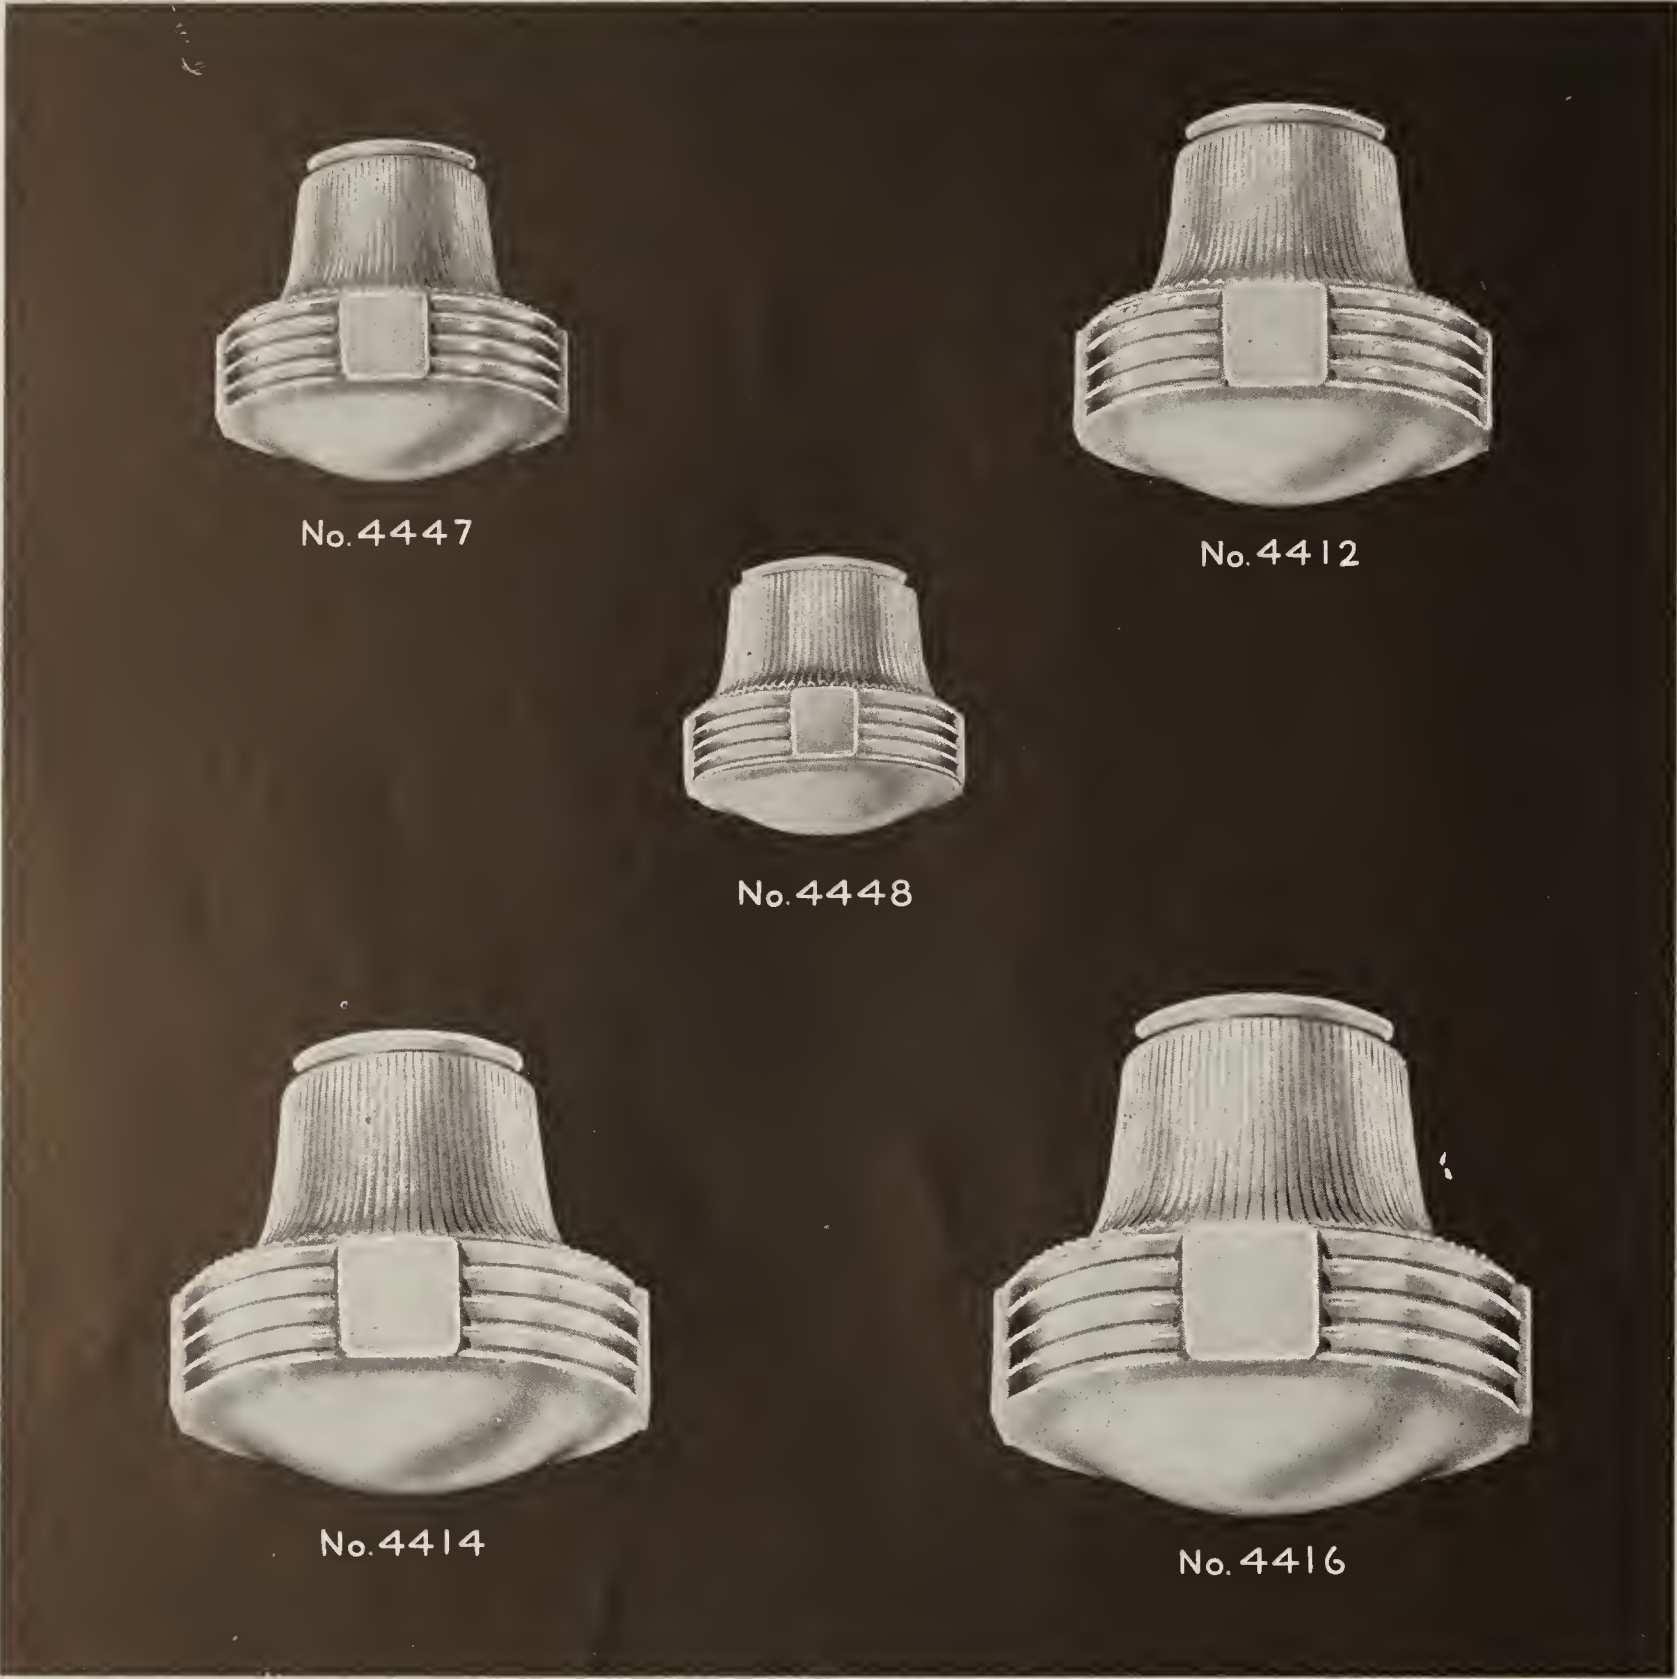

No. 4447 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 4412 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	10¼"	4	20 lbs.	150

No. 4448 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6¼"	12	21 lbs.	60

No. 4414 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	11¼"	2	13 lbs.	200

No. 4416 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	12¾"	1	8½ lbs.	300

Commercial and Residential Decorated Glassware



No.4447 - 674




No.4412 - 674



No.4448 - 674



No.4414 - 674

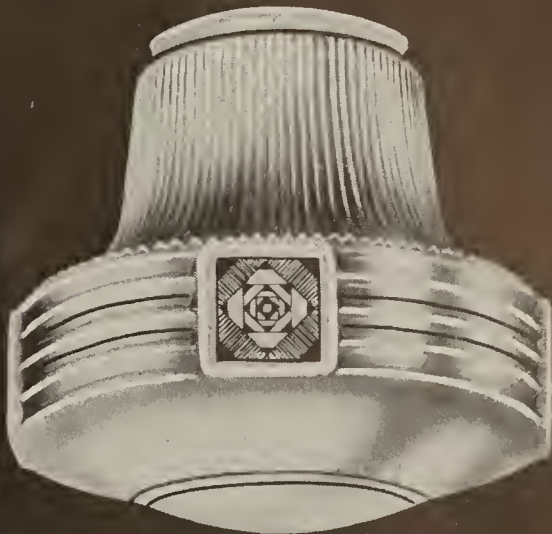

No.4416 - 674

No. 4447-674 BLACK DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 4412-674 BLACK DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	10¼"	1	5 lbs.	150

No. 4448-674 BLACK DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6¼"	12	21 lbs.	60

No. 4414-674 BLACK DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	11¼"	1	7 lbs.	200

No. 4416-674 BLACK DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	12¾"	1	8½ lbs.	300

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 141613

ORDER NO. 65172-S

PLATE NO 29732


CANDLEPOWER DISTRIBUTION

NO. 4464 ENCLOSING GLOBE*

Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications

Rendered to Erie Sales and Manufacturing Company


Globes - 31 Submitted; 25 Inspected and
Weighed; 6 Tested.
Light output range 78 to 82%, Average 79.5%.
Lamp-200 Watts; 115
Volts; 3640 Lumens;
PS30 Inside Frosted
Gas-Filled Bulb;
C-9 Filament;
Medium Base;
General Service.
Surface covering
globe opening,
reflection factor
0.40.
Weight of Test Sample -
4 lb 11 oz.

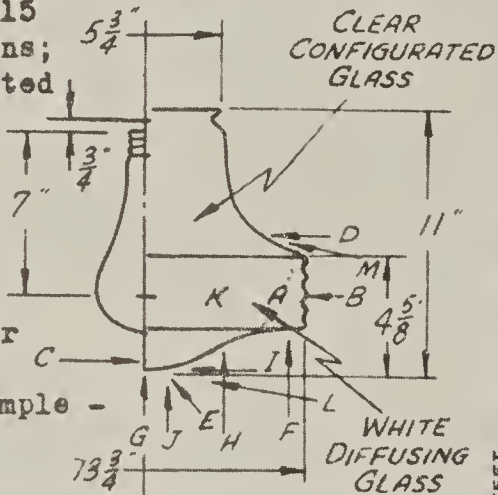

LUMINAIRE DISTRIBUTION DATA					
MEAN VERTICAL					
MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° UN.	112		90° HOR.	116	
175°	126	12	85°	99.5	112
165°	152	44	75°	101	107
155°	252	122	65°	121	120
145°	407	251	55°	145	130
135°	393	304	45°	164	127
125°	389	349	35°	177	111
115°	381	378	25°	188	87
105°	346	359	15°	194	55
95°	179	208	5°	196	19
			0° NADIR	196	

LIGHT FLUX VALUES				
ZONE	LUMENS		PER CENT TOTAL LUMENS BARE LAMP	PER CENT LIGHT OUTPUT
	LAMP	LUMINAIRE		
0°-60°	993	529	14.5	79.5
0°-90°	1852	868	24	
90°-180°	1788	2027	55.5	
0°-180°	3640	2895	79.5	

LUMINAIRE BRIGHTNESS	
----------------------	--

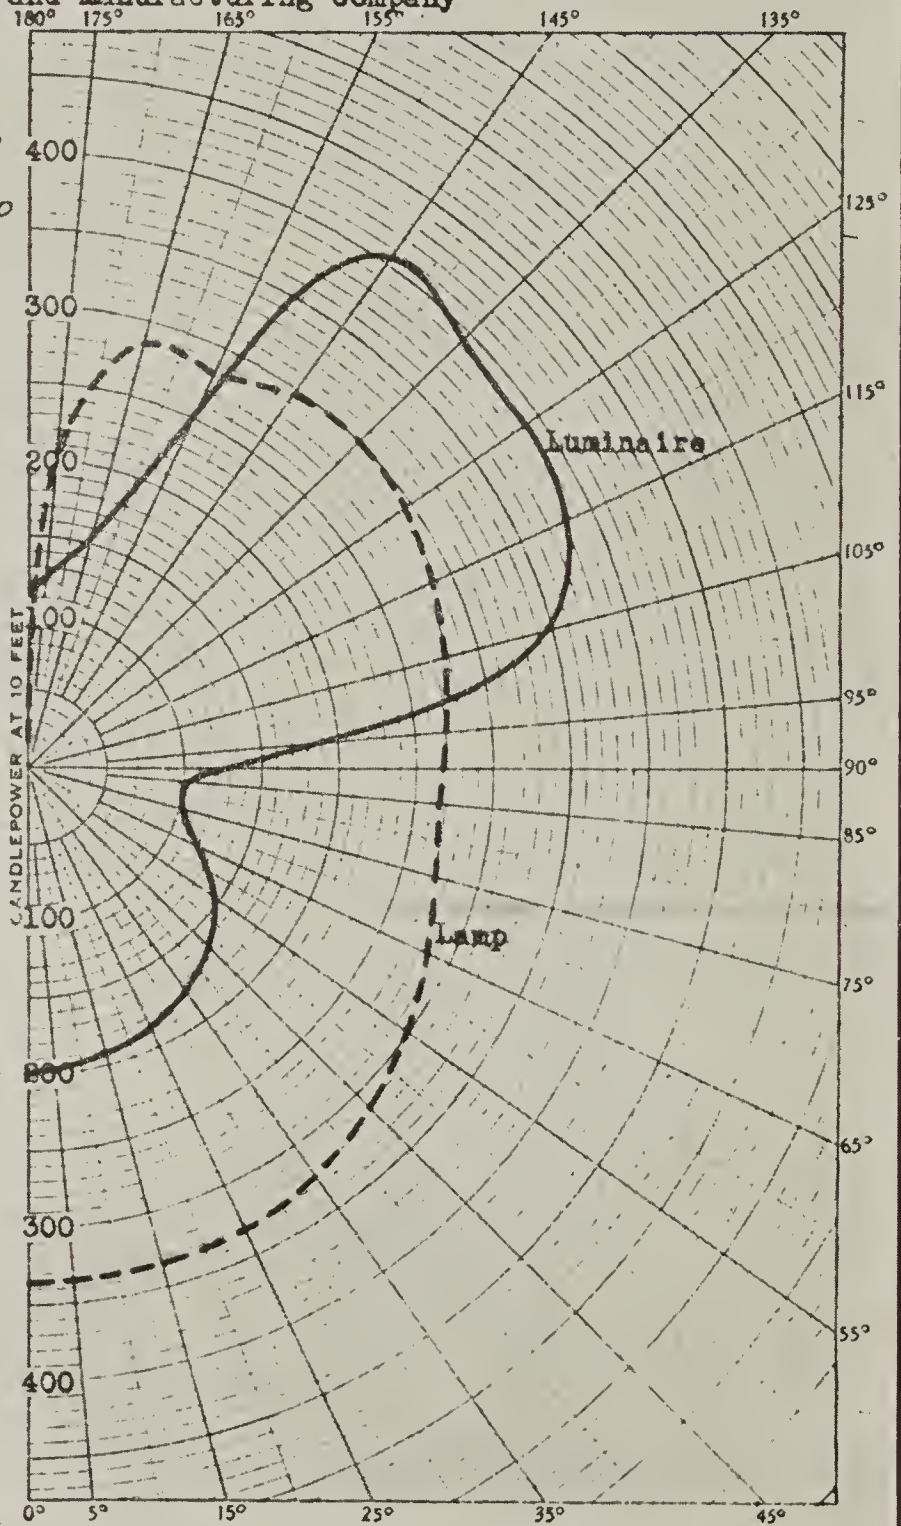

CANDLEPOWER PER SQUARE INCH
THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW


LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP. PER SQ. IN.	0.9	1.6	1.4	10.5	2.4	0.6	2.5	2.0	1.1	2.5	1.3	2.3	2.5

TESTED BY *HSC* PLOTTED BY *me* *E.T.L. Identification No. 7178
COMPUTED BY *me* CHECKED BY *me* ISSUED June 22, 1937.

APPROVED BY *William F. Smith*
ENGINEER IN CHARGE OF PHOTOMETRY

C. E. Horn
IN CHARGE OF TEST

Commercial and Residential Crystal Top Glassware

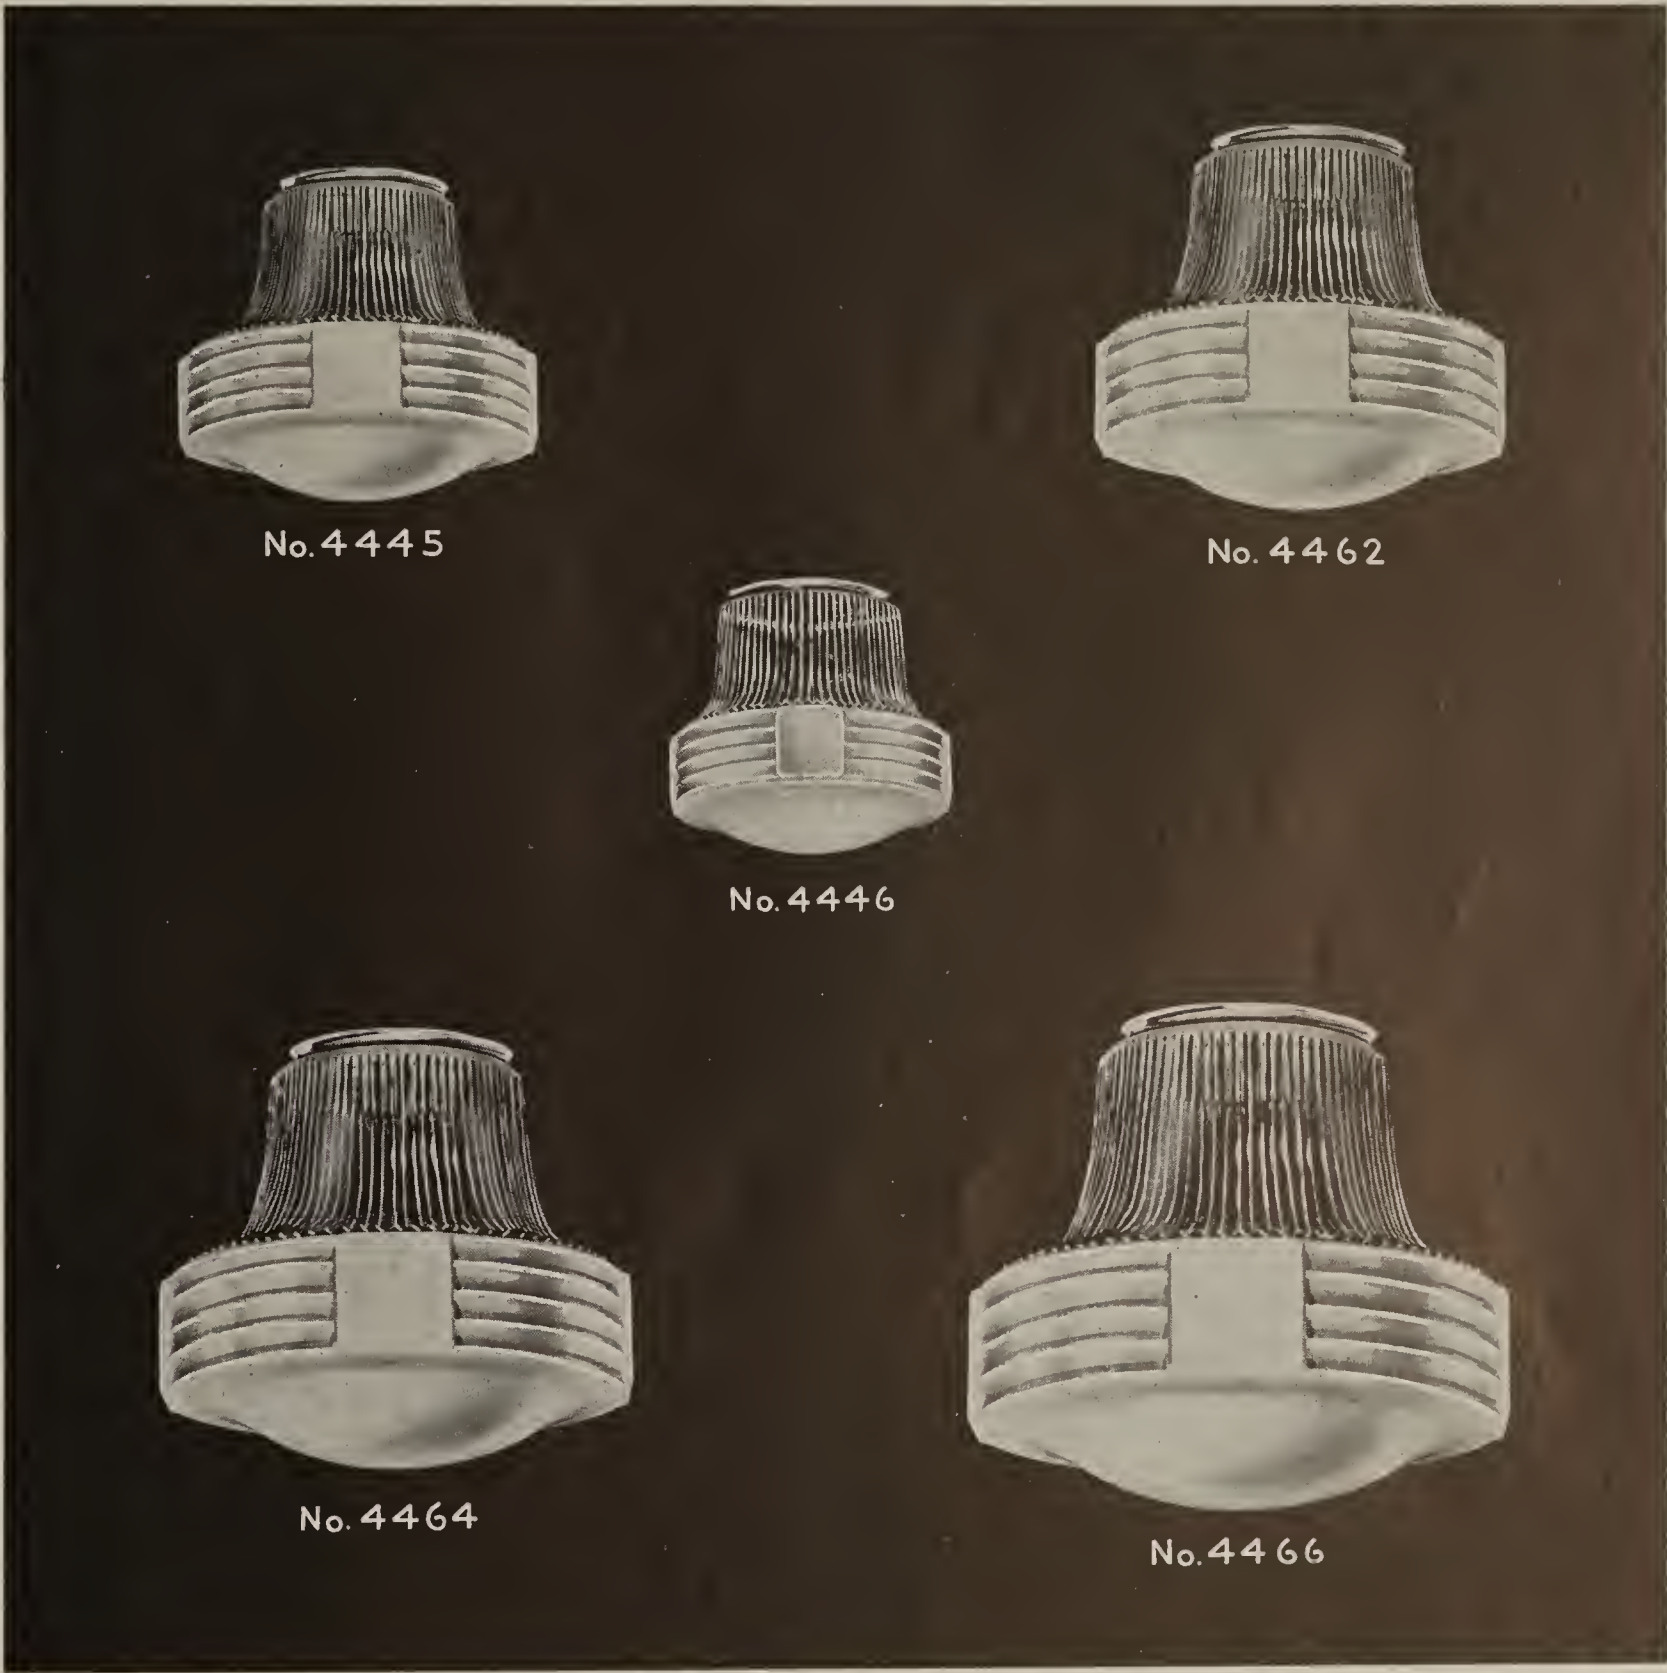

No. 4445					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 4462					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
12"	6"	10¼"	4	20 lbs.	150


No. 4446					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6¼"	12	21 lbs.	60

No. 4464					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
14"	6"	11¼"	2	13 lbs.	200

No. 4466					
Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
16"	6"	12¾"	1	8½ lbs.	300




No. 1406

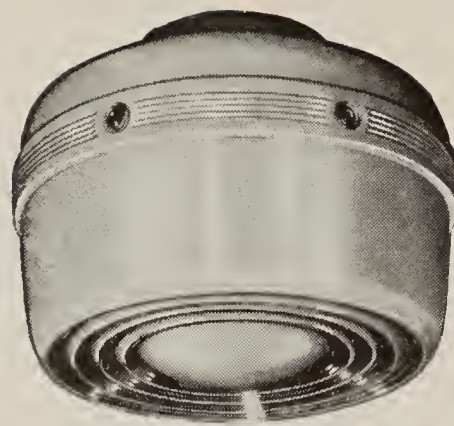


No. 1408



No. 1408-L

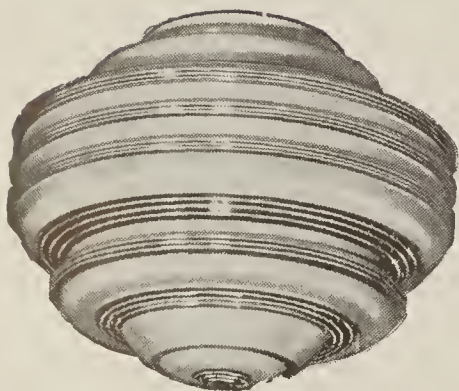

No 1708




No. 1706

**CRYSTAL
or
OPAL
DIRECTIONAL
LOUVRE
EFFECT
BOTTOM
UNITS**

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Louvre Diameter	Watt Capacity
1405	Same as No. 1406 except all Opal	6 $\frac{3}{8}$ "	4"	5 $\frac{7}{8}$ "	12	20 lbs.	10 $\frac{3}{4}$ "	60
1406	Crystal Directional Louvre Effect Bottom with Crystal Bull's Eyes.	6 $\frac{3}{8}$ "	4"	5 $\frac{7}{8}$ "	12	20 lbs.	10 $\frac{3}{4}$ "	60
1407	Same as No. 1408 except all Opal	8 $\frac{1}{2}$ "	4"	6 $\frac{3}{4}$ "	12	32 lbs.	13 $\frac{3}{4}$ "	100
1408	Crystal Directional Louvre Effect Bottom with Crystal Bull's Eyes.	8 $\frac{1}{2}$ "	4"	6 $\frac{3}{4}$ "	12	32 lbs.	13 $\frac{3}{4}$ "	100
1705	Opal	6 $\frac{7}{16}$ "	4"	5 $\frac{7}{8}$ "	12	20 lbs.	10 $\frac{3}{4}$ "	60
1703	Crystal Ribbed	6 $\frac{7}{16}$ "	4"	5 $\frac{7}{8}$ "	12	20 lbs.	10 $\frac{3}{4}$ "	60
1707	Opal	8 $\frac{1}{4}$ "	4"	6 $\frac{1}{2}$ "	12	30 lbs.	13 $\frac{3}{4}$ "	100
1708	Crystal Ribbed	8 $\frac{1}{4}$ "	4"	6 $\frac{1}{2}$ "	12	30 lbs.	13 $\frac{3}{4}$ "	100

NOTE: For units with LOUVRES specify the number of the unit followed by dash L as in illustrations of No. 1408-L.
Weights specified above do not include Louvres as these are packed separately.

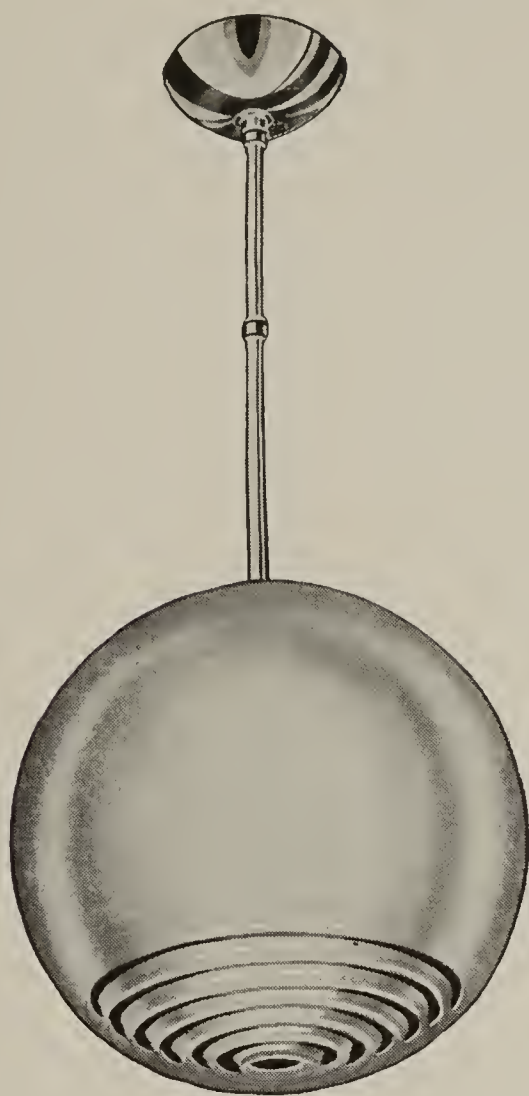


No. 15140
for
French Hanger

A unit which fills a wide-spread need for improved direct lighting.

The louvre bottom portion has been so designed as to prevent any glare, yet give a maximum of light.

Especially recommended for those establishments or laboratories where a bright comfortable light is desired.

(Note: Holders not furnished)

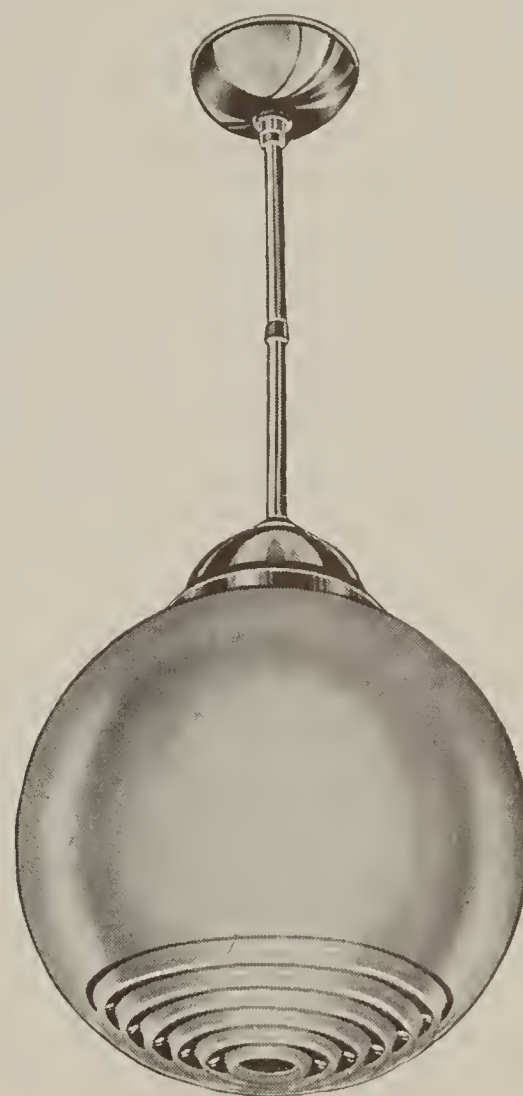

No. 1514
for
Standard 6" Fitter

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
1514	Crystal Directional Louvre Effect Bottom with standard fitter	14"	6"	14 $\frac{3}{16}$ "	1	10 lbs.	200
1515	Same as No. 1514 except all Opal	14"	6"	14 $\frac{3}{16}$ "	1	10 lbs.	200
15140	Same as No. 1514 except for French Hanger	14"		13 $\frac{11}{16}$ "	1	10 lbs.	200
15150	Same as No. 15140 except all Opal	14"		13 $\frac{11}{16}$ "	1	10 lbs.	200

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 149048

ORDER NO. 73122-S

PLATE NO. 33212

CANDLEPOWER DISTRIBUTION NO. 1414 ENCLOSING GLASS GLOBE*

Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications

Rendered to Erie Sales and Manufacturing Company


Globes - 32 Submitted; 25 Inspected and Weighed;
6 Tested. Light output range 74.5% to 76%.
Average 75.5%.

Lamp - 200 Watts; 115
Volts; 3640 Lumens;
PS30 Inside-Frosted
Bulb; C-9 Filament;
Medium Base;
General Service.

Surface covering
globe opening;
reflection factor 0.40.


Enameled glass with clear
louvers in bottom.

Weight of Test Sample - 66 ozs

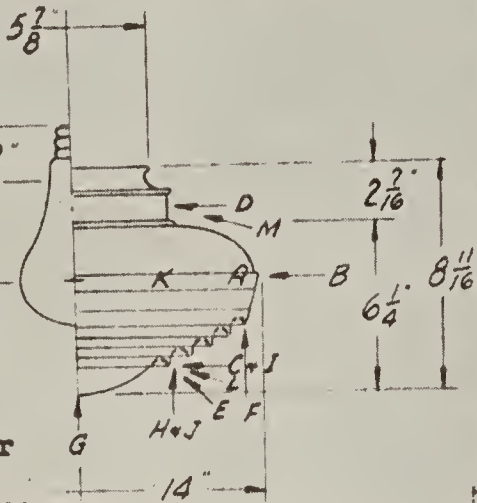

LUMINAIRE DISTRIBUTION DATA					
Mean Vertical					
MID- ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID- ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° HORIZ.	205		90° VERT.	164	
175°	203	19	85°	175	191
165°	198	56	75°	196	207
155°	200	93	65°	229	227
145°	194	122	55°	276	247
135°	188	145	45°	316	244
125°	180	161	35°	343	215
115°	169	168	25°	370	171
105°	155	164	15°	370	105
95°	157	172	5°	394	37
			0° VERT.	401	
LIGHT FLUX VALUES					
ZONE	LUMENS		PER CENT TOTAL LUMENS BASED LAMP	PER CENT LIGHT OUTPUT	
	LAMP	LUMINAIRE			
0°-60°	975	1019	28	75.5	
0°-90°	1861	1644	45		
90°-180°	1779	1100	30.5		
0°-180°	3640	2744	75.5		

LUMINAIRE BRIGHTNESS

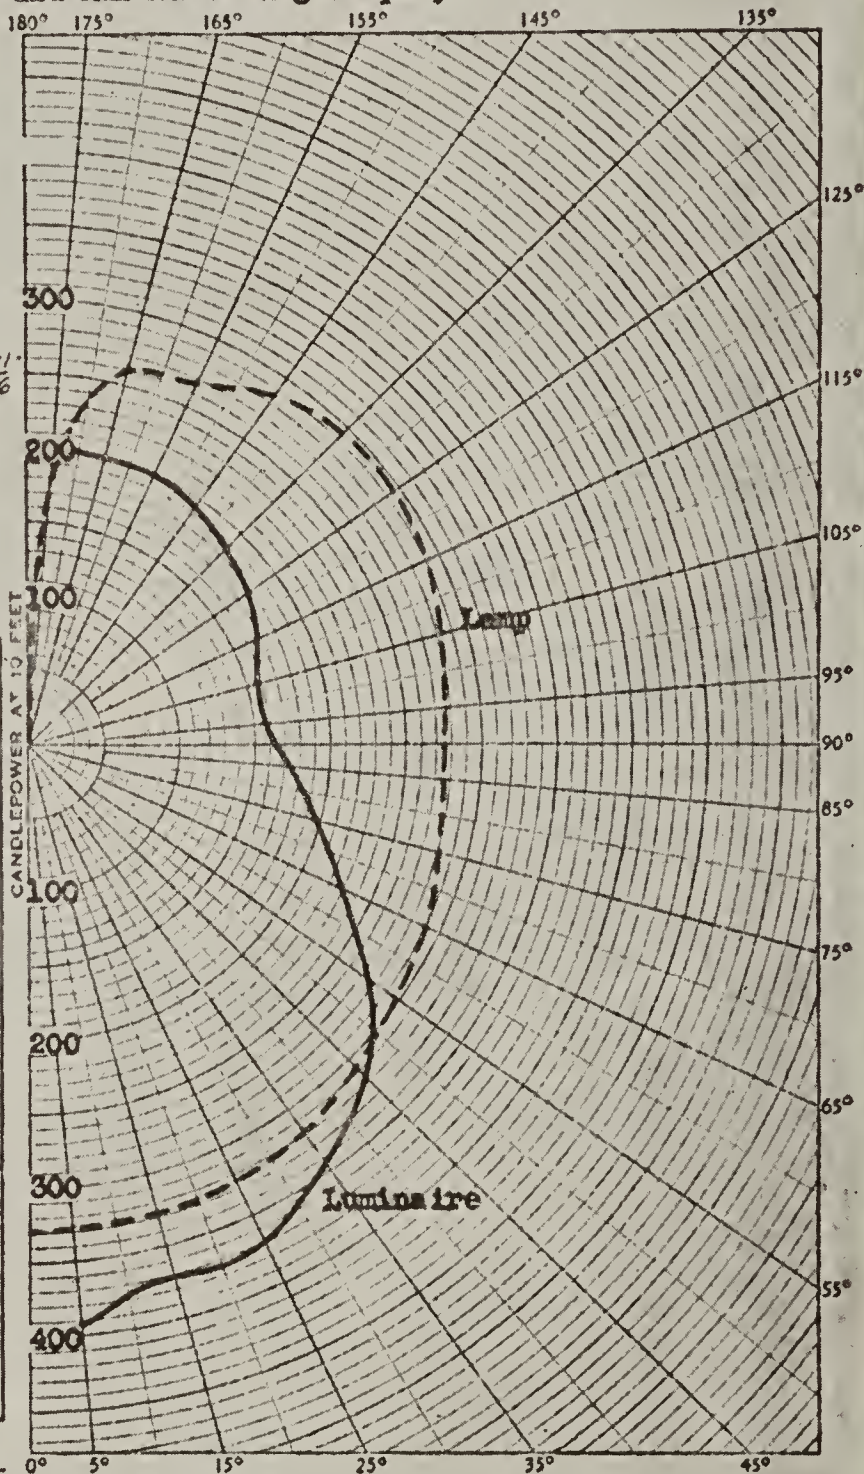

CANDLEPOWER PER SQUARE INCH

THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW

LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP. PER SQ. IN.	1.6	1.9	3.3	2.9	12.8	2.3	4.7	3.1	3.3	3.6	1.7	4.2	2.9

*E.T.L. Identification No. 9804

TESTED BY *HSC* PLOTTED BY *SK* COMPUTED BY *SK* CHECKED BY *SK* ISSUED **July 24, 1939.**




APPROVED BY

William F. Smith
ENGINEER IN CHARGE OF PHOTOMETRY

C. G. Horn
IN CHARGE OF TEST


A GRACEFUL
MODERN UNIT
COMBINED
WITH A
HIGH
DEGREE
OF LIGHT
EFFICIENCY.

ESPECIALLY
RECOM-
MENDED
FOR THE
LARGE
OFFICE
OR STORE.

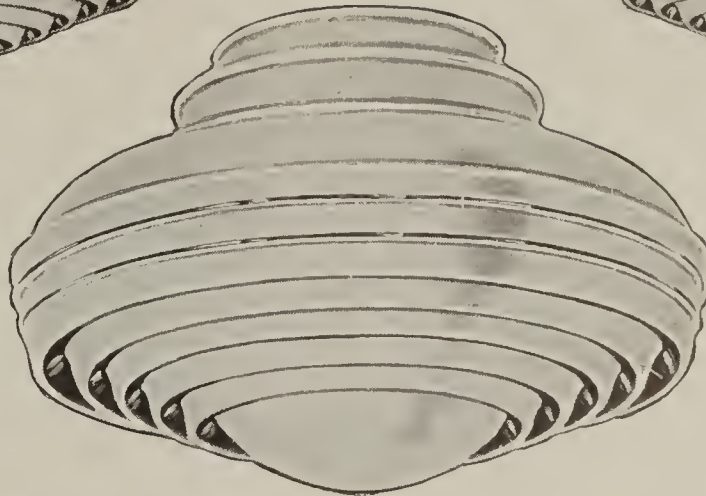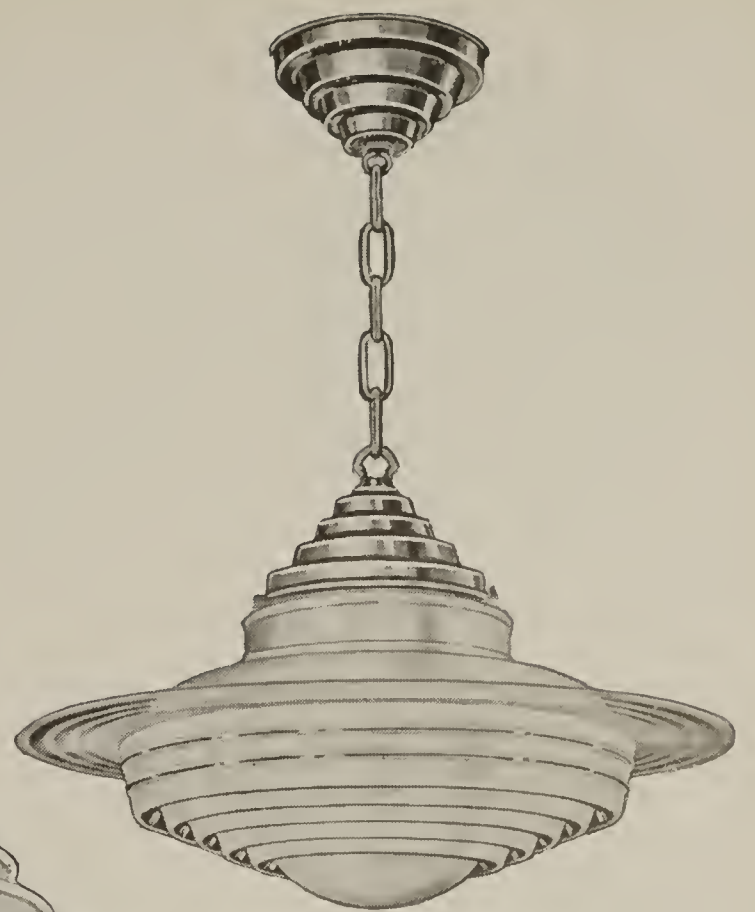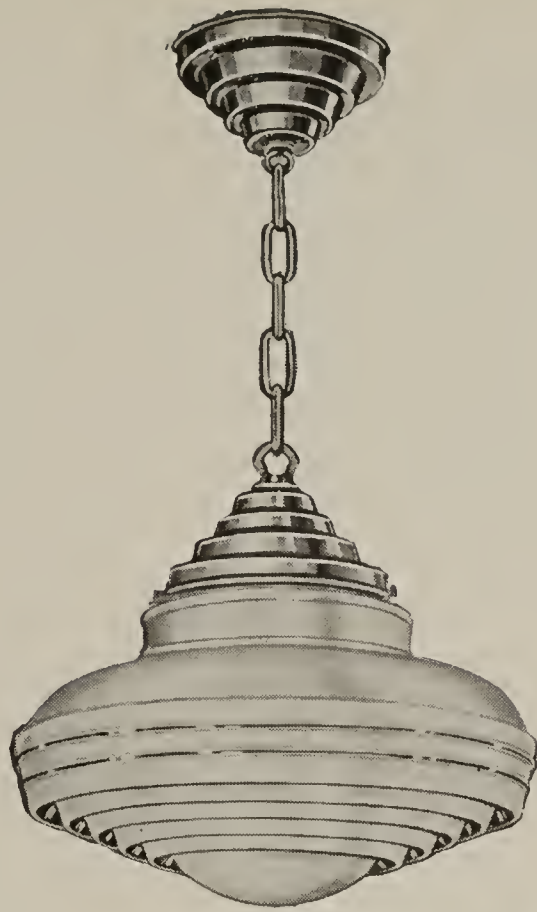


No. 1414

No. 1415

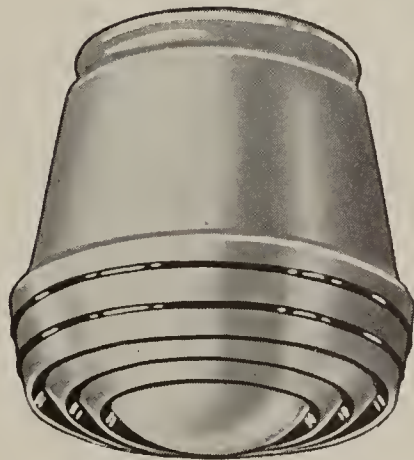

No. 1409

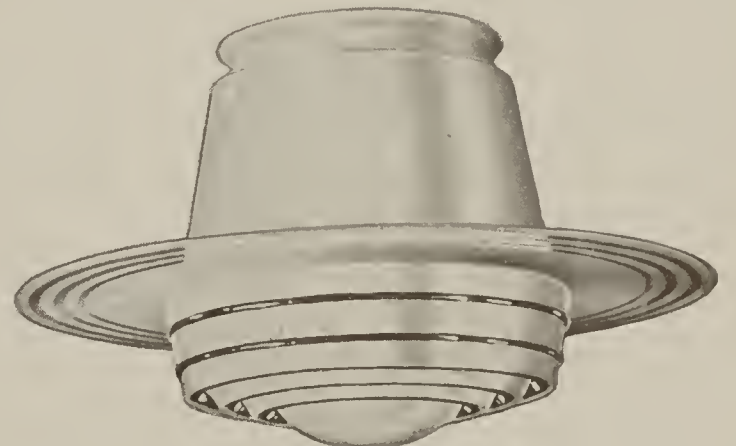

No. 1409-L

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Louvre Diameter	Suggested Wattage
1414	Crystal Directional Louvre Effect Bottom	14"	6"	8 $\frac{7}{8}$ "	1	8 lbs.	19 $\frac{1}{2}$ "	200
1415	Same as No. 1414 except all Opal	14"	6"	8 $\frac{7}{8}$ "	1	8 lbs.	19 $\frac{1}{2}$ "	200
1409	Crystal Directional Louvre Effect Bottom	8 $\frac{1}{2}$ "	6"	8 $\frac{1}{4}$ "	12	33 lbs.	13 $\frac{3}{4}$ "	150
1410	Same as No. 1409 except all Opal	8 $\frac{1}{2}$ "	6"	8 $\frac{1}{4}$ "	12	33 lbs.	13 $\frac{3}{4}$ "	150

NOTE: When ordering either the No. 1409, No. 1410, No. 1414 or No. 1415 with removable Louvre, specify either No. 1409-L, No. 1410-L, No. 1414-L or 1415-L.

Weights specified above do not include Louvres as these are packed separately.

Holders shown in the above are merely for illustrative purposes and are not furnished by us.




No. 109




No. 110

**OPAL
or
CRYSTAL-
RIBBED
UNITS**

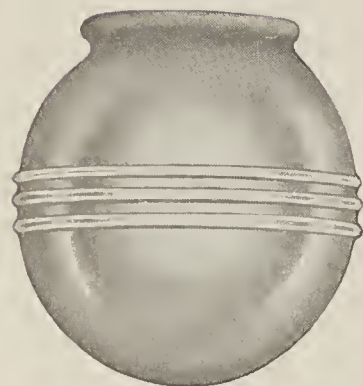

No. 111

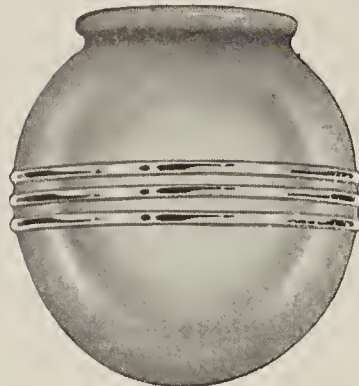


No. 112


Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Louvre Diameter	Suggested Wattage
109	All Opal	8 ⁷ / ₁₆ "	4"	8 ³ / ₈ "	12	30 lbs.	13 ³ / ₄ "	100
110	Crystal Ribs	8 ⁷ / ₁₆ "	4"	8 ³ / ₈ "	12	30 lbs.	13 ³ / ₄ "	100
111	All Opal	6 ³ / ₈ "	4"	6 ³ / ₈ "	12	20 lbs.	10 ³ / ₄ "	60
112	Crystal Ribs	6 ³ / ₈ "	4"	6 ³ / ₈ "	12	20 lbs.	10 ³ / ₄ "	60

NOTE: The units illustrated above are obtainable with removable glass louvres with sand-blasted design.


OPAL,
OPAL-
DECORATED
OR
CRYSTAL-
RIBBED
UNITS

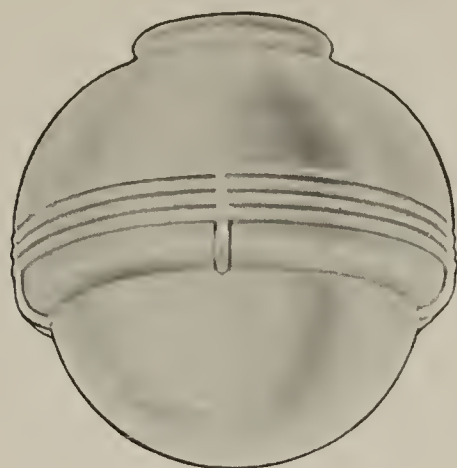

No. 120

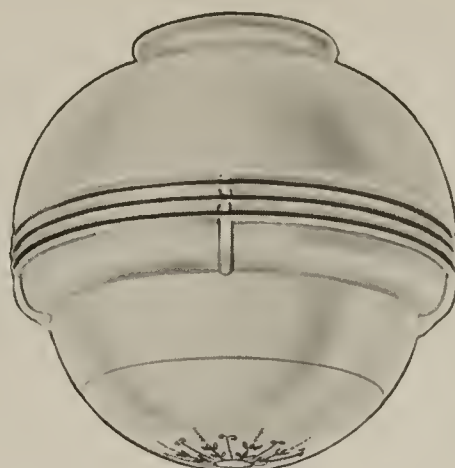


No. 122

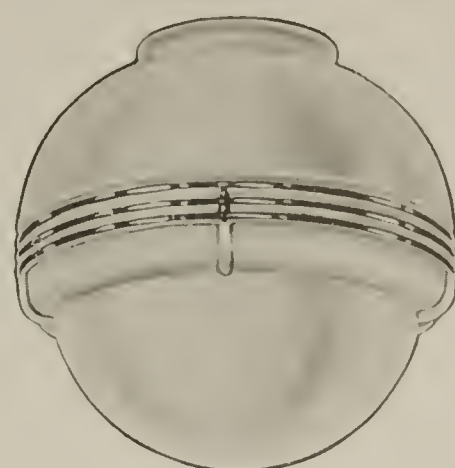


No. 121



No. 123

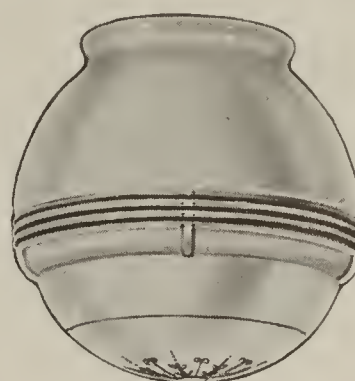


No. 125

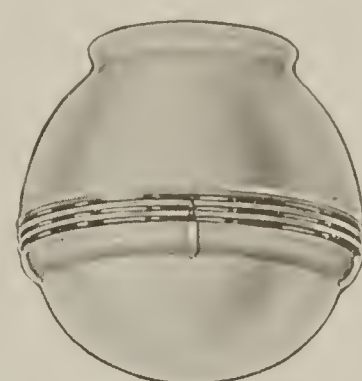


No. 124

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
120	All Opal	8 $\frac{7}{16}$ "	4"	8 $\frac{7}{16}$ "	12	30 lbs.	100
121	Crystal Ribs	8 $\frac{7}{16}$ "	4"	8 $\frac{7}{16}$ "	12	30 lbs.	100
122	Opal with Black Decoration	8 $\frac{7}{16}$ "	4"	8 $\frac{7}{16}$ "	12	30 lbs.	100
123	All Opal	6 $\frac{7}{16}$ "	4"	6 $\frac{3}{8}$ "	12	20 lbs.	60
124	Crystal Ribs	6 $\frac{7}{16}$ "	4"	6 $\frac{3}{8}$ "	12	20 lbs.	60
125	Opal with Black Decoration	6 $\frac{7}{16}$ "	4"	6 $\frac{3}{8}$ "	12	20 lbs.	60

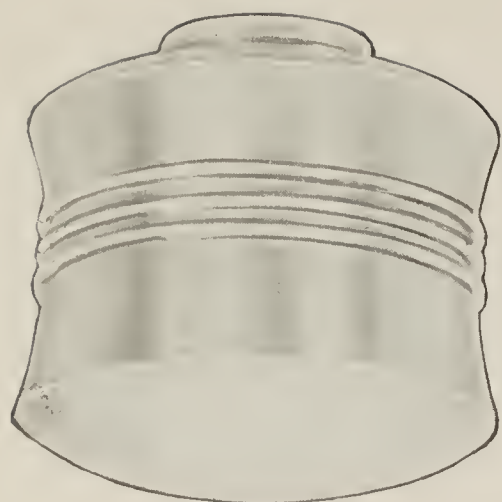


No. 130

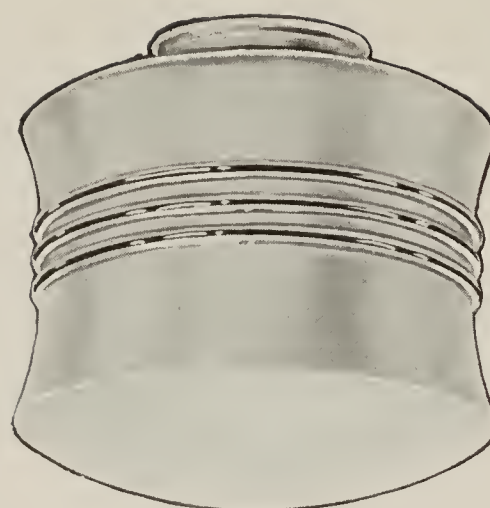


No. 131



No. 132



No. 674

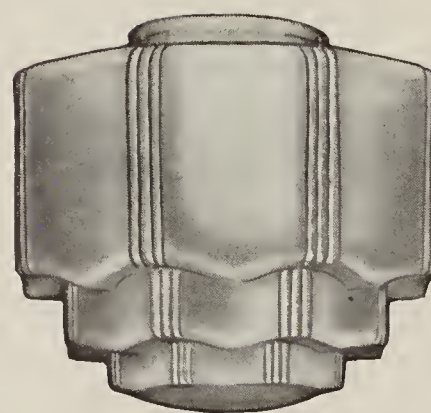


No. 874


OPAL,
OPAL-
DECORATED
AND
CRYSTAL-
RIBBED
UNITS

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
130	All Opal	8 ⁷ / ₁₆ "	4"	8 ³ / ₈ "	12	30 lbs.	100
131	Crystal Ribs	8 ⁷ / ₁₆ "	4"	8 ³ / ₈ "	12	30 lbs.	100
132	Opal with Black Decoration	8 ⁷ / ₁₆ "	4"	8 ³ / ₈ "	12	30 lbs.	100
674	All Opal	6 ⁵ / ₁₆ "	4"	6 ³ / ₈ "	12	20 lbs.	60
874	All Opal	8 ¹ / ₈ "	4"	7 ³ / ₄ "	12	32 lbs.	100

OPAL
or
CRYSTAL TOP
with
CRYSTAL
BOTTOM
UNITS
with
LOUVRES

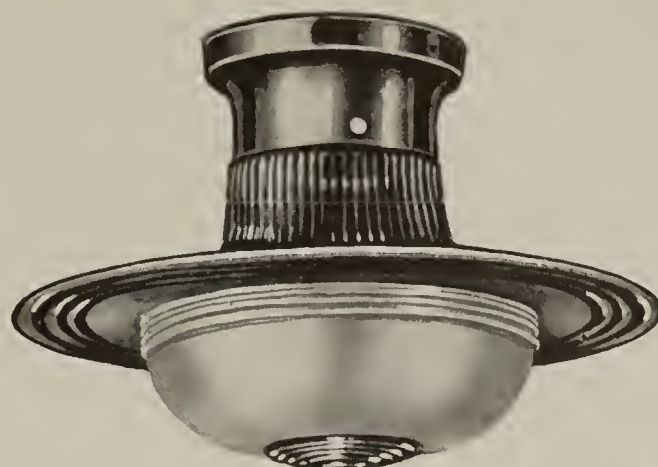

No. 3445-L

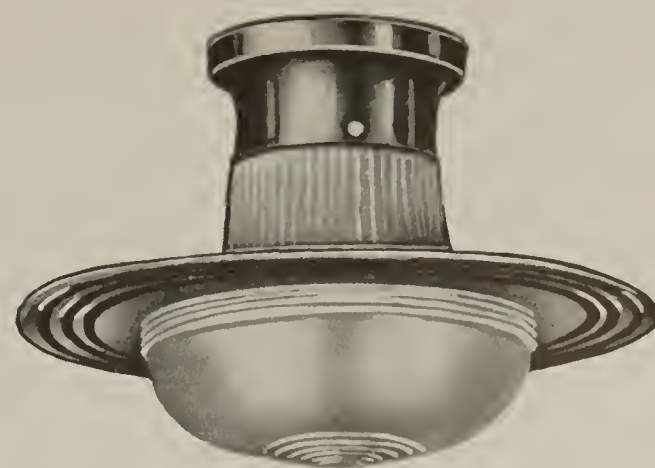


No. 3447-L



No. 3452-L



No. 3446-L

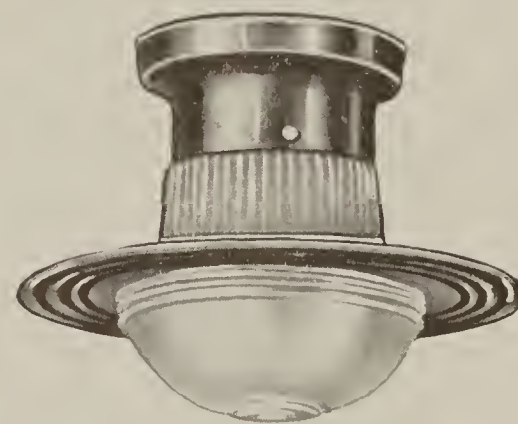

No. 3448-L

FOR THE SPACIOUS KITCHEN, BREAKFAST ROOM, FOYER or BATH ROOM, THE USE OF LOUVRES WILL DO MUCH TO CREATE AN APPEARANCE OF A LARGER UNIT AND MORE CHEERFUL LIGHTING.

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Louvre Diameter	Suggested Wattage
3445-L	Crystal Top and Bottom—with Louvre	8½"	4"	7½"	12	35 lbs.	13¾"	100
3446-L	Crystal Top and Bottom—with Louvre	6¼"	4"	6¾"	12	21 lbs.	10¾"	60
3447-L	All Opal—with Louvre	8½"	4"	7½"	12	35 lbs.	13¾"	100
3448-L	All Opal—with Louvre	6¼"	4"	6¾"	12	21 lbs.	10¾"	60
3452-L	Opal with Removable Crystal Bottom Dish and with Louvre	6¾"	2¼"	5¾"	12	22 lbs.	10¾"	60

NOTE: Weights specified above do not include Louvres as these are packed separately.

Holders illustrated above are merely for illustrative purposes and are not furnished by us.

Opal, Crystal Top and Bottom, and Ivory Decorated Glassware



No. 3446



No. 3448-682



No. 3446-3



No. 3448



No. 3448-1

No. 3446 CRYSTAL TOP AND BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 1/4"	4"	6 3/8"	12	21 lbs.	60

No. 3448-682 IVORY GLASS DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 1/4"	4"	6 3/8"	12	21 lbs.	60

No. 3446-3 CRYSTAL TOP AND BOTTOM WITH COLORED LINES

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 1/4"	4"	6 3/8"	12	21 lbs.	60

No. 3448 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 1/4"	4"	6 3/8"	12	21 lbs.	60

No. 3448-1 OPAL WITH COLORED LINES

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6 1/4"	4"	6 3/8"	12	21 lbs.	60

NOTE:—For units with colored lines use the following decoration numbers:

Decoration No. 1—Black Lines.
 Decoration No. 2—Green Lines.
 Decoration No. 3—Blue Lines
 Decoration No. 4—Red Lines.

Opal, Crystal Top and Bottom, and Ivory Decorated Glassware



No. 3445



No. 3447-682



No. 3445-3



No. 3447



No. 3447-1

No. 3445 CRYSTAL TOP AND BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7½"	12	35 lbs.	100

No. 3447-682 IVORY GLASS DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7½"	12	35 lbs.	100

No. 3445-3 CRYSTAL TOP AND BOTTOM WITH COLORED LINES

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7½"	12	35 lbs.	100

No. 3447 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7½"	12	35 lbs.	100


No. 3447-1 OPAL WITH COLORED LINES

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7½"	12	35 lbs.	100

NOTE:—For units with colored lines use the following decoration numbers:

- Decoration No. 1—Black Lines.
- Decoration No. 2—Green Lines.
- Decoration No. 3—Blue Lines.
- Decoration No. 4—Red Lines.

Opal, Crystal Center and Bottom, and Ivory Decorated Glassware

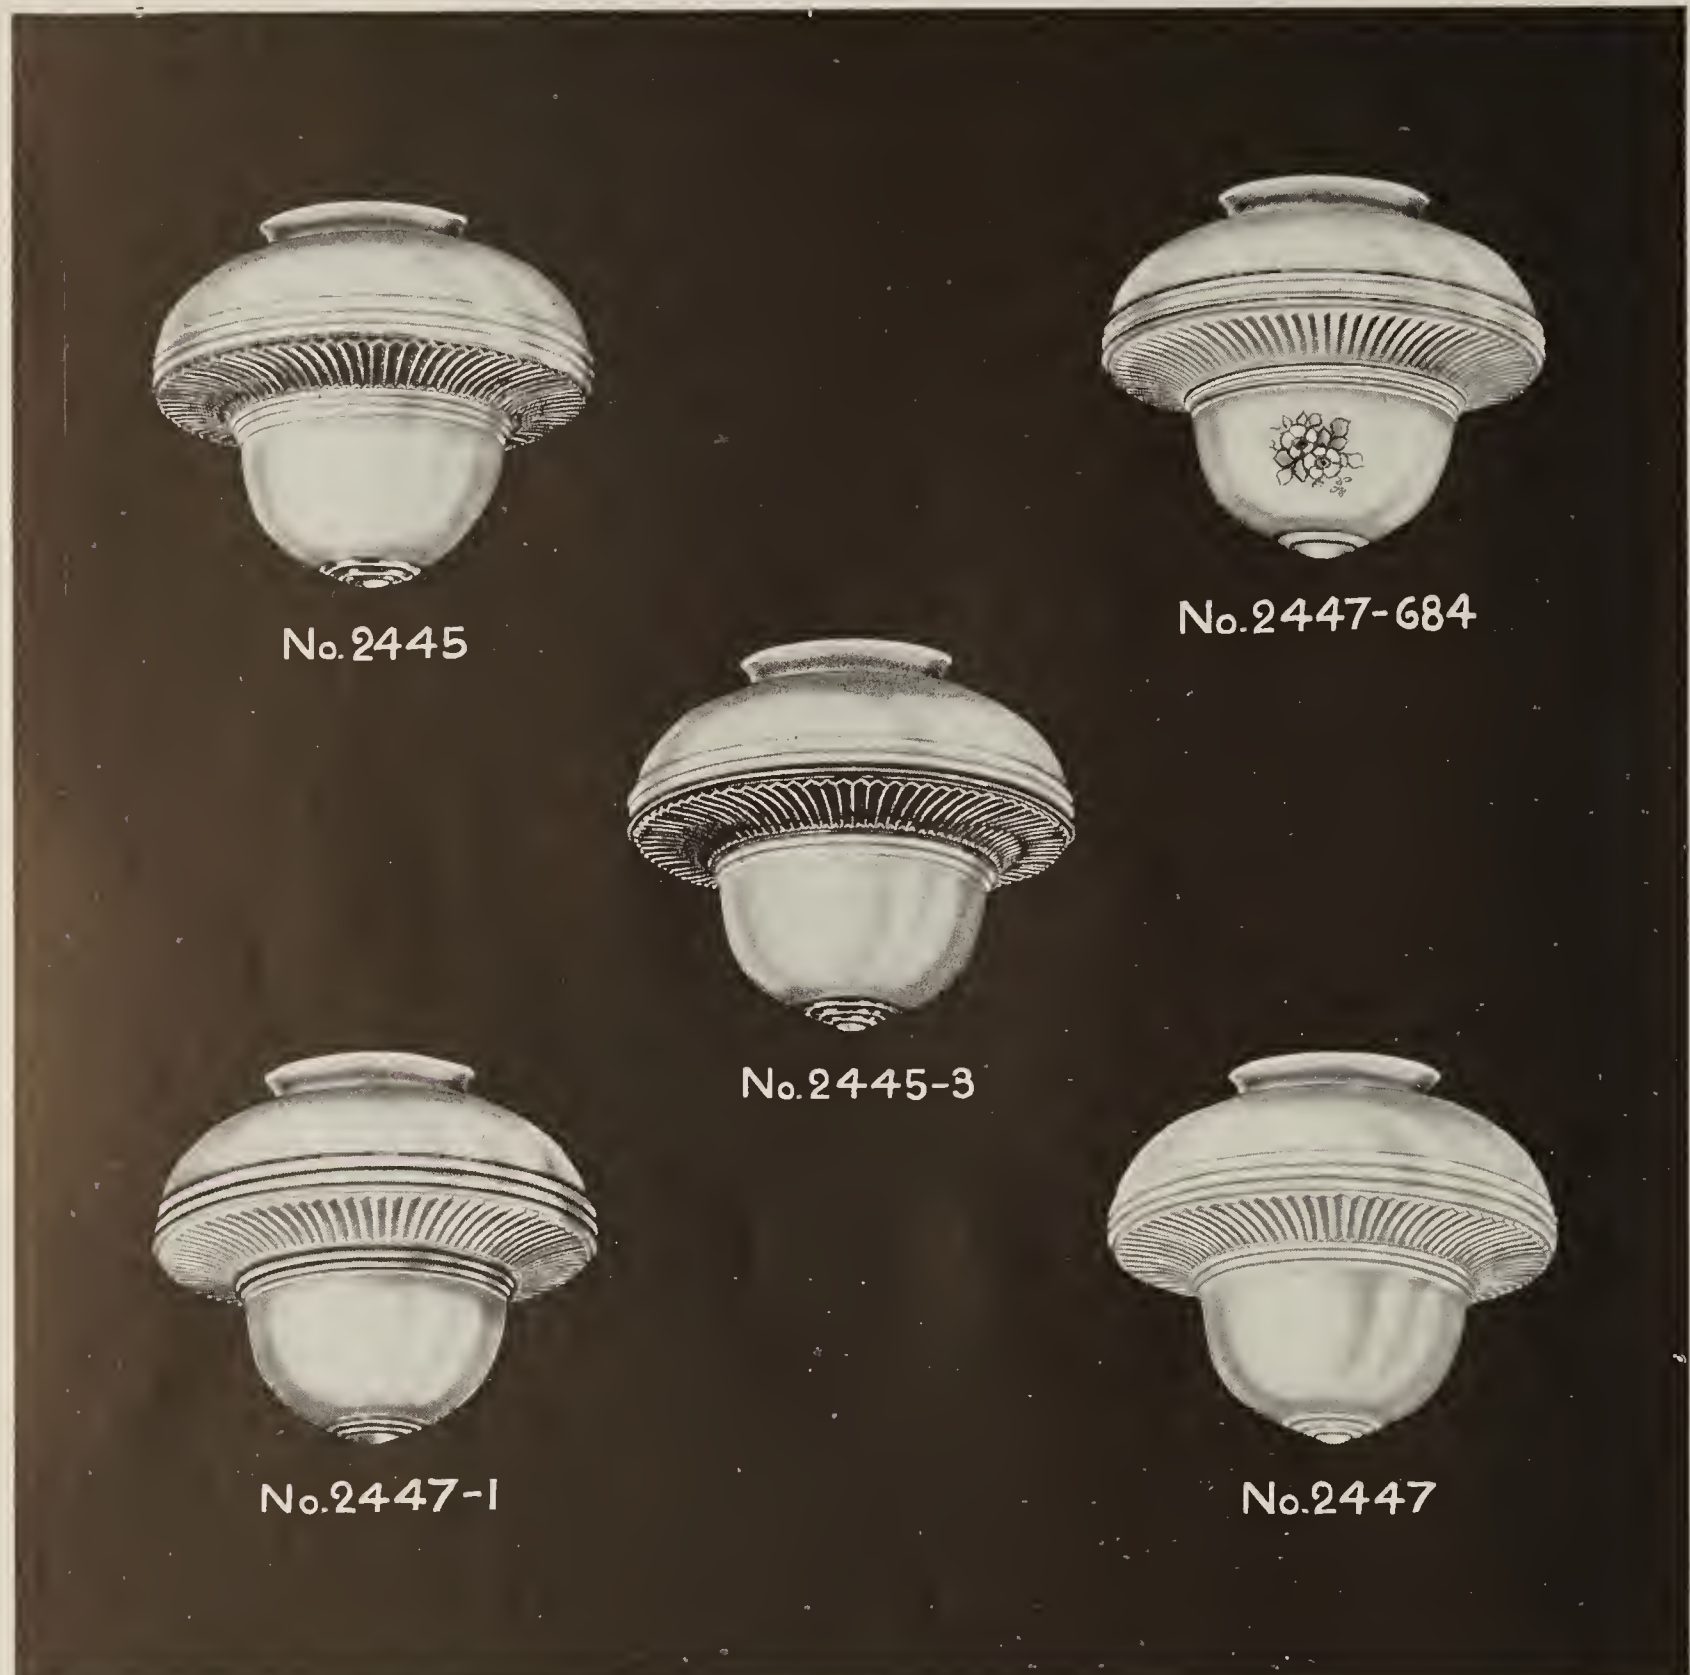

No. 2445 CRYSTAL CENTER AND BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7"	12	35 lbs.	100

No. 2447-684 IVORY GLASS DECORATED

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7"	12	35 lbs.	100

**No. 2445-3 CRYSTAL CENTER AND BOT-
TOM WITH COLORED LINES**

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7"	12	35 lbs.	100

No. 2447-1 OPAL WITH COLORED LINES

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7"	12	35 lbs.	100

No. 2447 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7"	12	35 lbs.	100

NOTE:—For units with colored lines use the following decoration numbers:

- Decoration No. 1—Black Lines.
- Decoration No. 2—Green Lines.
- Decoration No. 3—Blue Lines.
- Decoration No. 4—Red Lines.

Opal, Crystal Top and Bottom, and Ivory Decorated Glassware




No. 3450




No. 3450-1



No. 3449

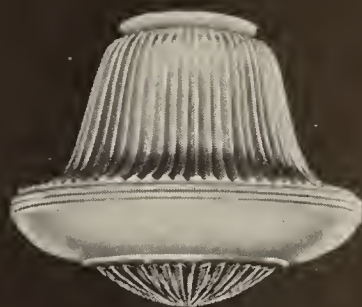

No. 3452

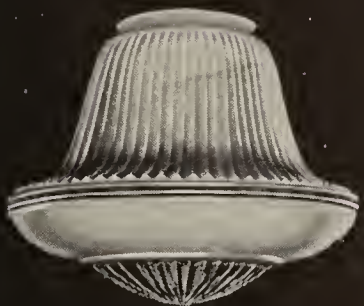

No. 3452-1



No. 3452-682



No. 3449-1

Cat. No.	Description	Diam.	Fitter	Depth	Std. Pkg.	Wt. Per Carton	Sug. Watt.
3449	OPAL—OPEN BOTTOM	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{1}{4}$ "	12	20 lbs.	60
3449-1	OPEN BOTTOM—WITH COLORED LINES	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{1}{4}$ "	12	20 lbs.	60
3450	CRYSTAL TOP—OPEN BOTTOM	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{1}{4}$ "	12	20 lbs.	60
3450-1	CRYSTAL TOP—OPEN BOTTOM WITH COLORED LINES	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{1}{4}$ "	12	20 lbs.	60
3452	REMOVABLE CRYSTAL BOTTOM	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{3}{4}$ "	12	22 lbs.	60
3452-1	REMOVABLE CRYSTAL BOTTOM WITH COLORED LINES	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{3}{4}$ "	12	22 lbs.	60
3452-682	IVORY GLASS DECORATED REMOVABLE CRYSTAL BOTTOM	6 $\frac{3}{8}$ "	2 $\frac{1}{4}$ "	5 $\frac{3}{4}$ "	12	22 lbs.	60

NOTE:—For units with colored lines use the following decoration numbers:

Decoration No. 1—Black Lines.
 Decoration No. 2—Green Lines.
 Decoration No. 3—Blue Lines.
 Decoration No. 4—Red Lines.

ELECTRICAL TESTING LABORATORIES

NEW YORK, N. Y.

REPORT NO. 149046

ORDER NO. 73122-S

PLATE NO. 33210

CANDLEPOWER DISTRIBUTION NO.1614 ENCLOSING GLASS GLOBE*

Tested in Compliance with Illuminating Engineering Society
Standard Testing Specifications
Rendered to Erie Sales and Manufacturing Company


Globes - 26 Submitted; 25 Inspected and Weighed;
6 Tested. Light output 6" range 80% to 81.5%.
Average 81%.

Lamp - 200 Watts;
115 Volts; 3640
Lumens; PS30
Inside-Frosted
Bulb; C-9 Filament;
Medium Base; General
Service.

Surface covering globe
opening, reflection factor
0.40.

White Diffusing Glass

Weight of Test Sample - 55 ozs

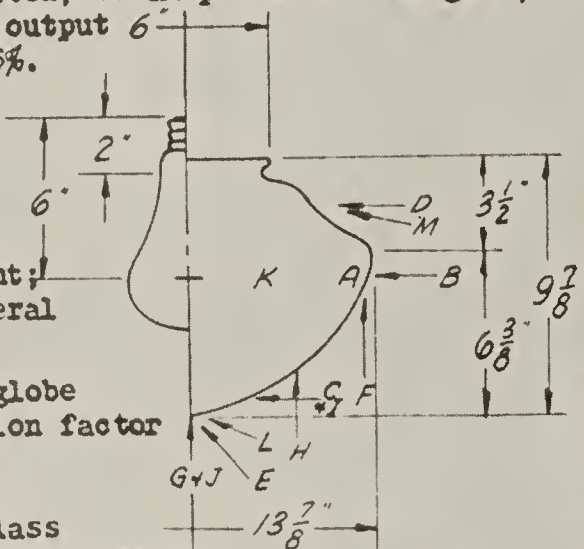

LUMINAIRE DISTRIBUTION DATA					
Mean Vertical					
MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS	MID-ZONE ANGLES	CANDLEPOWER AT 10 FEET	ZONAL LUMENS
180° IN.	236		90° HOR	203	
175°	232	22	85°	209	228
165°	228	65	75°	223	236
155°	225	104	65°	244	242
145°	211	133	55°	271	243
135°	201	156	45°	298	231
125°	195	175	35°	321	208
115°	192	191	25°	339	157
105°	194	205	15°	350	99
95°	198	216	5°	355	34
			0° NADIR	355	

LIGHT FLUX VALUES				
ZONE	LUMENS		PER CENT TOTAL LUMENS BARE LAMP	PER CENT LIGHT OUTPUT
	LAMP	LUMINAIRE		
0°-60°	975	966	26.5	81
0°-90°	1861	1672	46	
90°-180°	1779	1267	35	
0°-180°	3640	2939	81	

LUMINAIRE BRIGHTNESS

CANDLEPOWER PER SQUARE INCH
THE ARROWS INDICATE THE LOCATION AND ANGLE OF VIEW


LOCATIONS	A	B	C	D	E	F	G	H	I	J	K	L	M
CP PER SQ IN	1.6	2.1	2.1	2.2	3.0	2.1	3.1	2.5	2.2	3.1	2.1	2.7	2.1

TESTED BY *JSC* PLOTTED BY *Im* *E.T.L. Identification No. 9799
COMPUTED BY *Em* CHECKED BY *EX* ISSUED July 21, 1939.

APPROVED BY

William T. Leach
ELECTRICAL TESTING LABORATORIES


C. E. Horn
IN CHARGE OF TEST

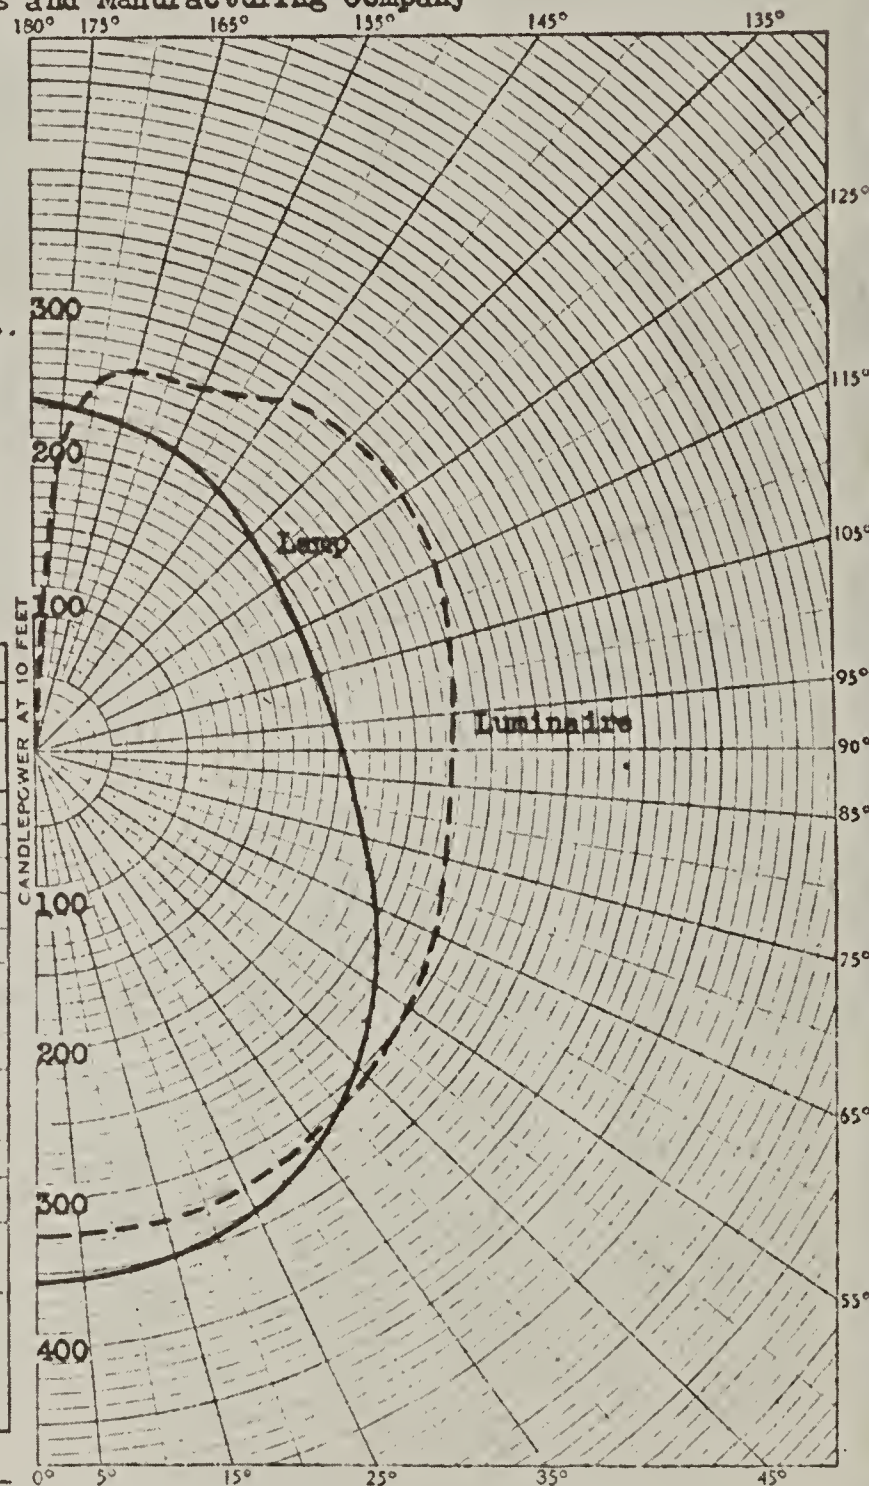



The ideal unit for the classroom and approved by many cities for this purpose. Also an excellent unit for any public building.

Soft, yet efficient light, these units are made of the highest quality opal glass and are guaranteed to be glareless.

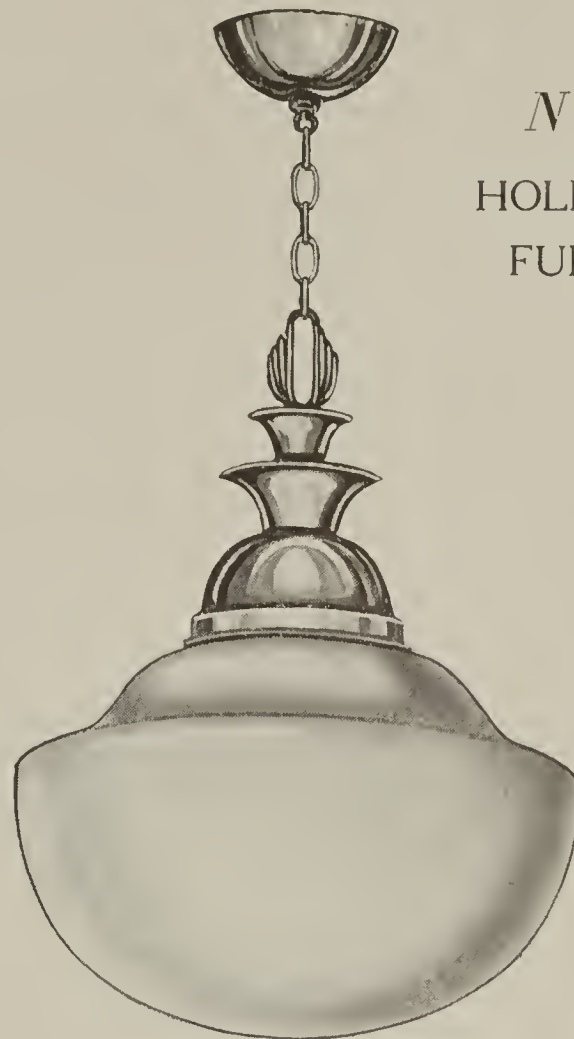

NOTE!!
HOLDERS NOT
FURNISHED



Obtainable in 8", 9", 10", 12", 14", 16" and 18" Diameter. See Page 30 for results of tests conducted by The Electrical Testing Laboratories.

Turn to Page 32 for descriptive information on all sizes.

Opal Commercial Glassware and Striped Units for Kitchen



No. 5608 8"
 No. 5609 9"
 No. 5610 10"
 No. 5612 12"
 No. 5614 14"
 No. 5616 16"



No. 1608 8"
 No. 1609 9"
 No. 1610 10"
 No. 1612 12"
 No. 1614 14"
 No. 1616 16"
 No. 1618 18"



No. 300-1 8 11/16"



No. 5608-1 8"
 No. 5609-1 9"



No. 1608-1 8"
 No. 1609-1 9"

No. 300-1 OPAL WITH COLORED LINES													
			Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage					
			8 11/16"	4"	6¾"	12	28 lbs.	100					
No.	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage	No.	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
5608	8"	4"	6¾"	12	28 lbs.	100	1608	8½"	4"	6¾"	12	28 lbs.	100
5609	9"	4"	7"	12	30 lbs.	100	1609	9"	4"	7¼"	12	30 lbs.	100
5610	10"	4 or 6"	7½"	8	22 lbs.	150	1610	10"	4 or 6"	8"	8	22 lbs.	150
5612	12"	4 or 6"	7 13/16"	4	18 lbs.	150	1612	12"	6"	9"	4	18 lbs.	150
5614	14"	6"	9¼"	2	14 lbs.	200	1614	14"	6"	10"	2	14 lbs.	200
5616	16"	6"	10"	1	8 lbs.	300	1616	16"	6"	16"	1	8 lbs.	300
							1618	18"	6"	18"	1	8 lbs.	300
NOTE:—For units with colored lines use the following decoration numbers:													

Modern Commercial Units



No. 1000



No. 1076-18




No. 1276-18




No. 974-18

Catalog No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
974	All Opal	9"	4"	7 $\frac{7}{8}$ "	8	26 lbs.	100
974-18	Opal with Black Decoration	9"	4"	7 $\frac{7}{8}$ "	8	26 lbs.	100
1000	2-Piece—Opal with Crystal Bottom	9 $\frac{1}{16}$ "	6"	12 $\frac{5}{8}$ "	8	47 lbs.	200
1276	All Opal	12 $\frac{1}{2}$ "	6"	10"	1	9 lbs.	150
1276-18	Opal with Black Decoration	12 $\frac{1}{2}$ "	6"	10"	1	9 lbs.	150
1076	All Opal	10"	6"	16"	1	8 lbs.	200
1076-18	Opal with Black Decoration	10"	6"	16"	1	8 lbs.	200


The "Erie" 6400 Series

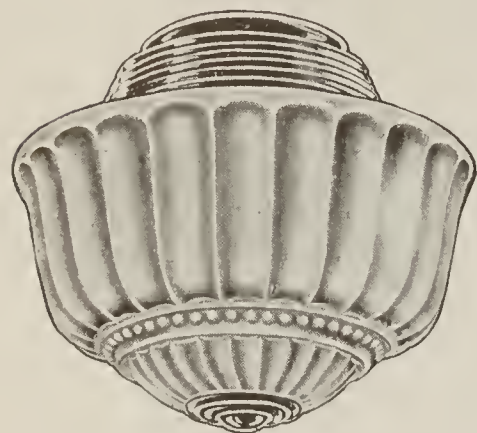

No. 6445

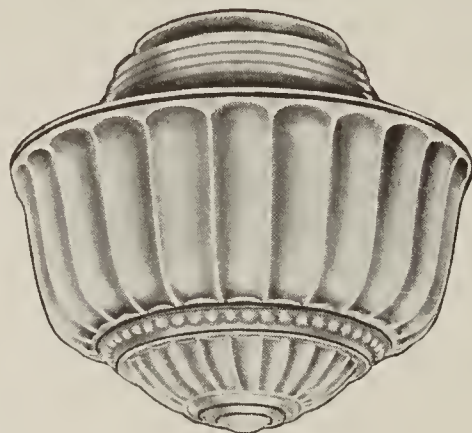


No. 6447-1

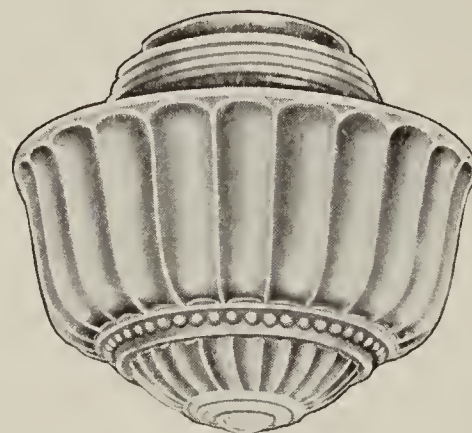


No. 6447


OPAL
or
CRYSTAL TOP
and
BOTTOM
UNITS

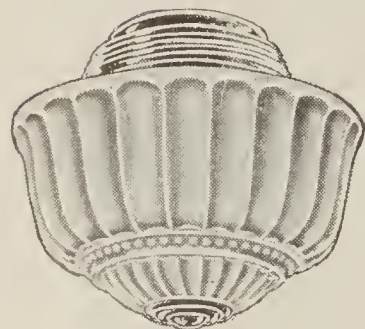

No. 6446

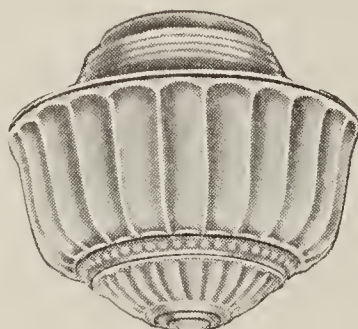

No. 6448-1

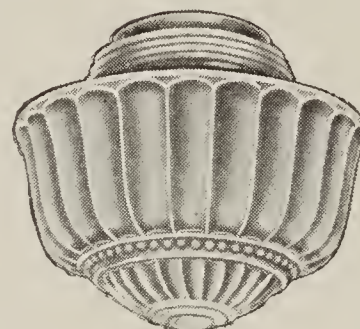

No. 6448

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6445	Crystal Top and Crystal Bottom	8½"	4"	7⅜"	12	33 lbs.	100
6446	Crystal Top and Crystal Bottom	6½"	4"	6¼"	12	21 lbs.	60
6447	All Opal	8½"	4"	7⅜"	12	33 lbs.	100
6447-1	All Opal with Colored Lines	8½"	4"	7⅜"	12	33 lbs.	100
6448	All Opal	6½"	4"	6¼"	12	21 lbs.	60
6448-1	All Opal with Colored Lines	6½"	4"	6¼"	12	21 lbs.	60

NOTE:—For units with colored lines use the following decoration numbers:

Decoration No. 1—Black Lines.

Decoration No. 2—Green Lines.

Decoration No. 3—Blue Lines

Decoration No. 4—Red Lines.

Opal and Crystal Top Kitchen Glassware



No. 5447 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 5445 CRYSTAL TOP

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100


No. 5448 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6¾"	4"	6¼"	12	21 lbs.	60

No. 5446 CRYSTAL TOP

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6¾"	4"	6¼"	12	21 lbs.	60

Opal Crystal and Open Bottom Glassware

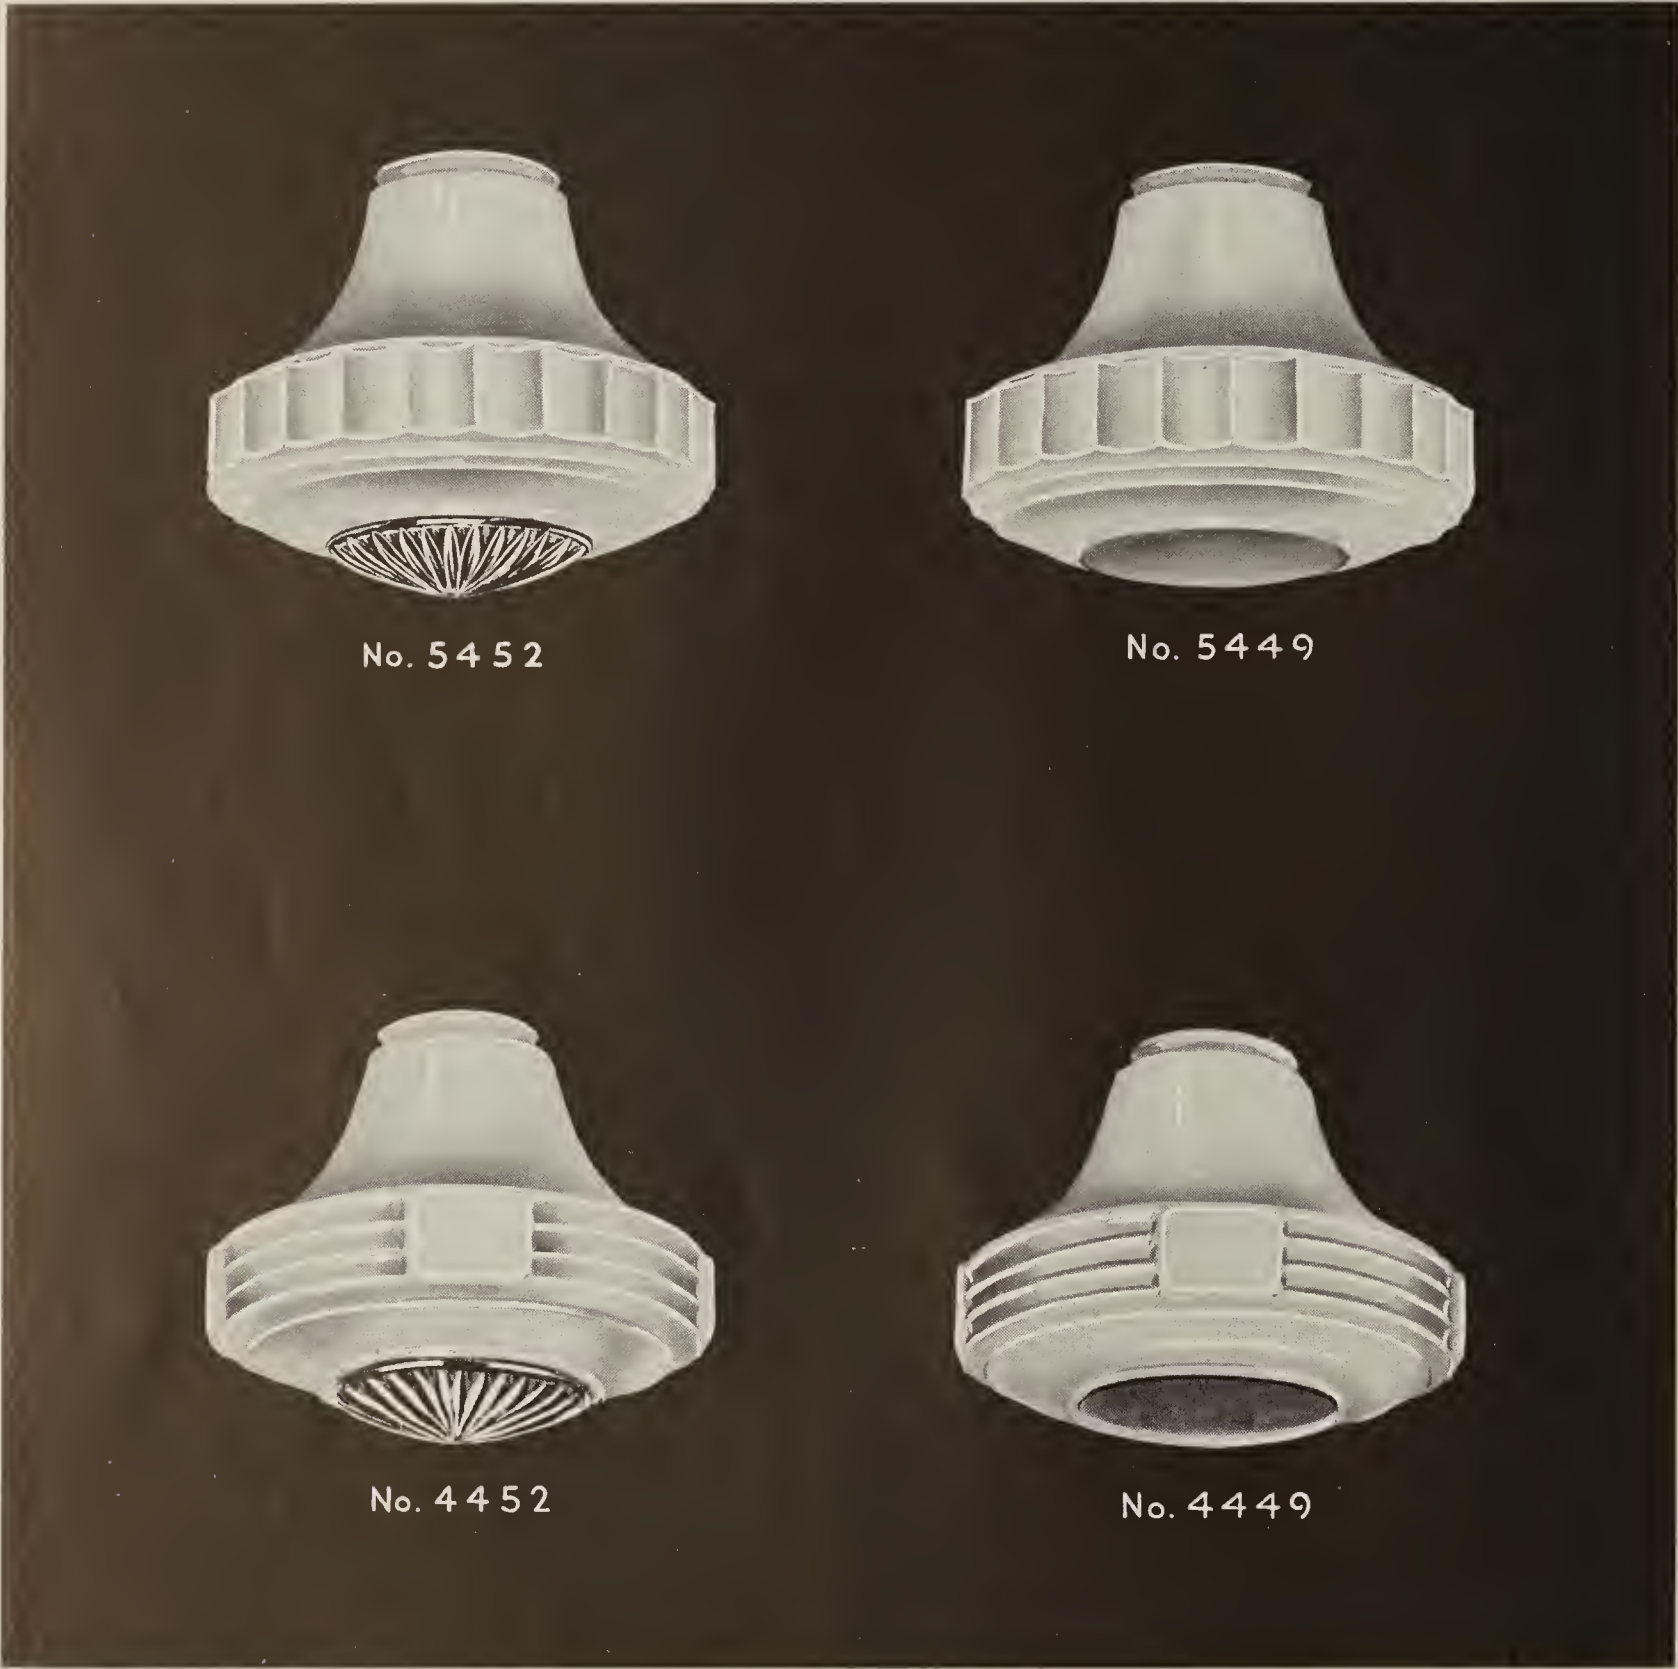

No. 5452 REMOVABLE CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2 1/4"	6"	12	24 lbs.	60

No. 4452 REMOVABLE CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2 1/4"	6 1/4"	12	24 lbs.	60

No. 5449 OPAL—OPEN BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2 1/4"	5 3/8"	12	22 lbs.	60

No. 4449 OPAL—OPEN BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2 1/4"	5 3/8"	12	22 lbs.	60

Ivory Decorated Glassware



No. 5447-754



No. 5448-754



No. 5452-754



No. 5449-754



No. 4452-655



No. 4449-655

No. 5447-754

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 5452-754 REMOVABLE CRYSTAL
BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2¼"	6"	12	24 lbs.	60

No. 4452-655 REMOVABLE CRYSTAL
BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2¼"	6"	12	24 lbs.	60

No. 5448-754

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6¾"	4"	6¼"	12	21 lbs.	60


No. 5449-754

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2¼"	5¾"	12	22 lbs.	60

No. 4449-655

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
7"	2¼"	5¾"	12	22 lbs.	60

Opal and Crystal Bottom Kitchen Glassware

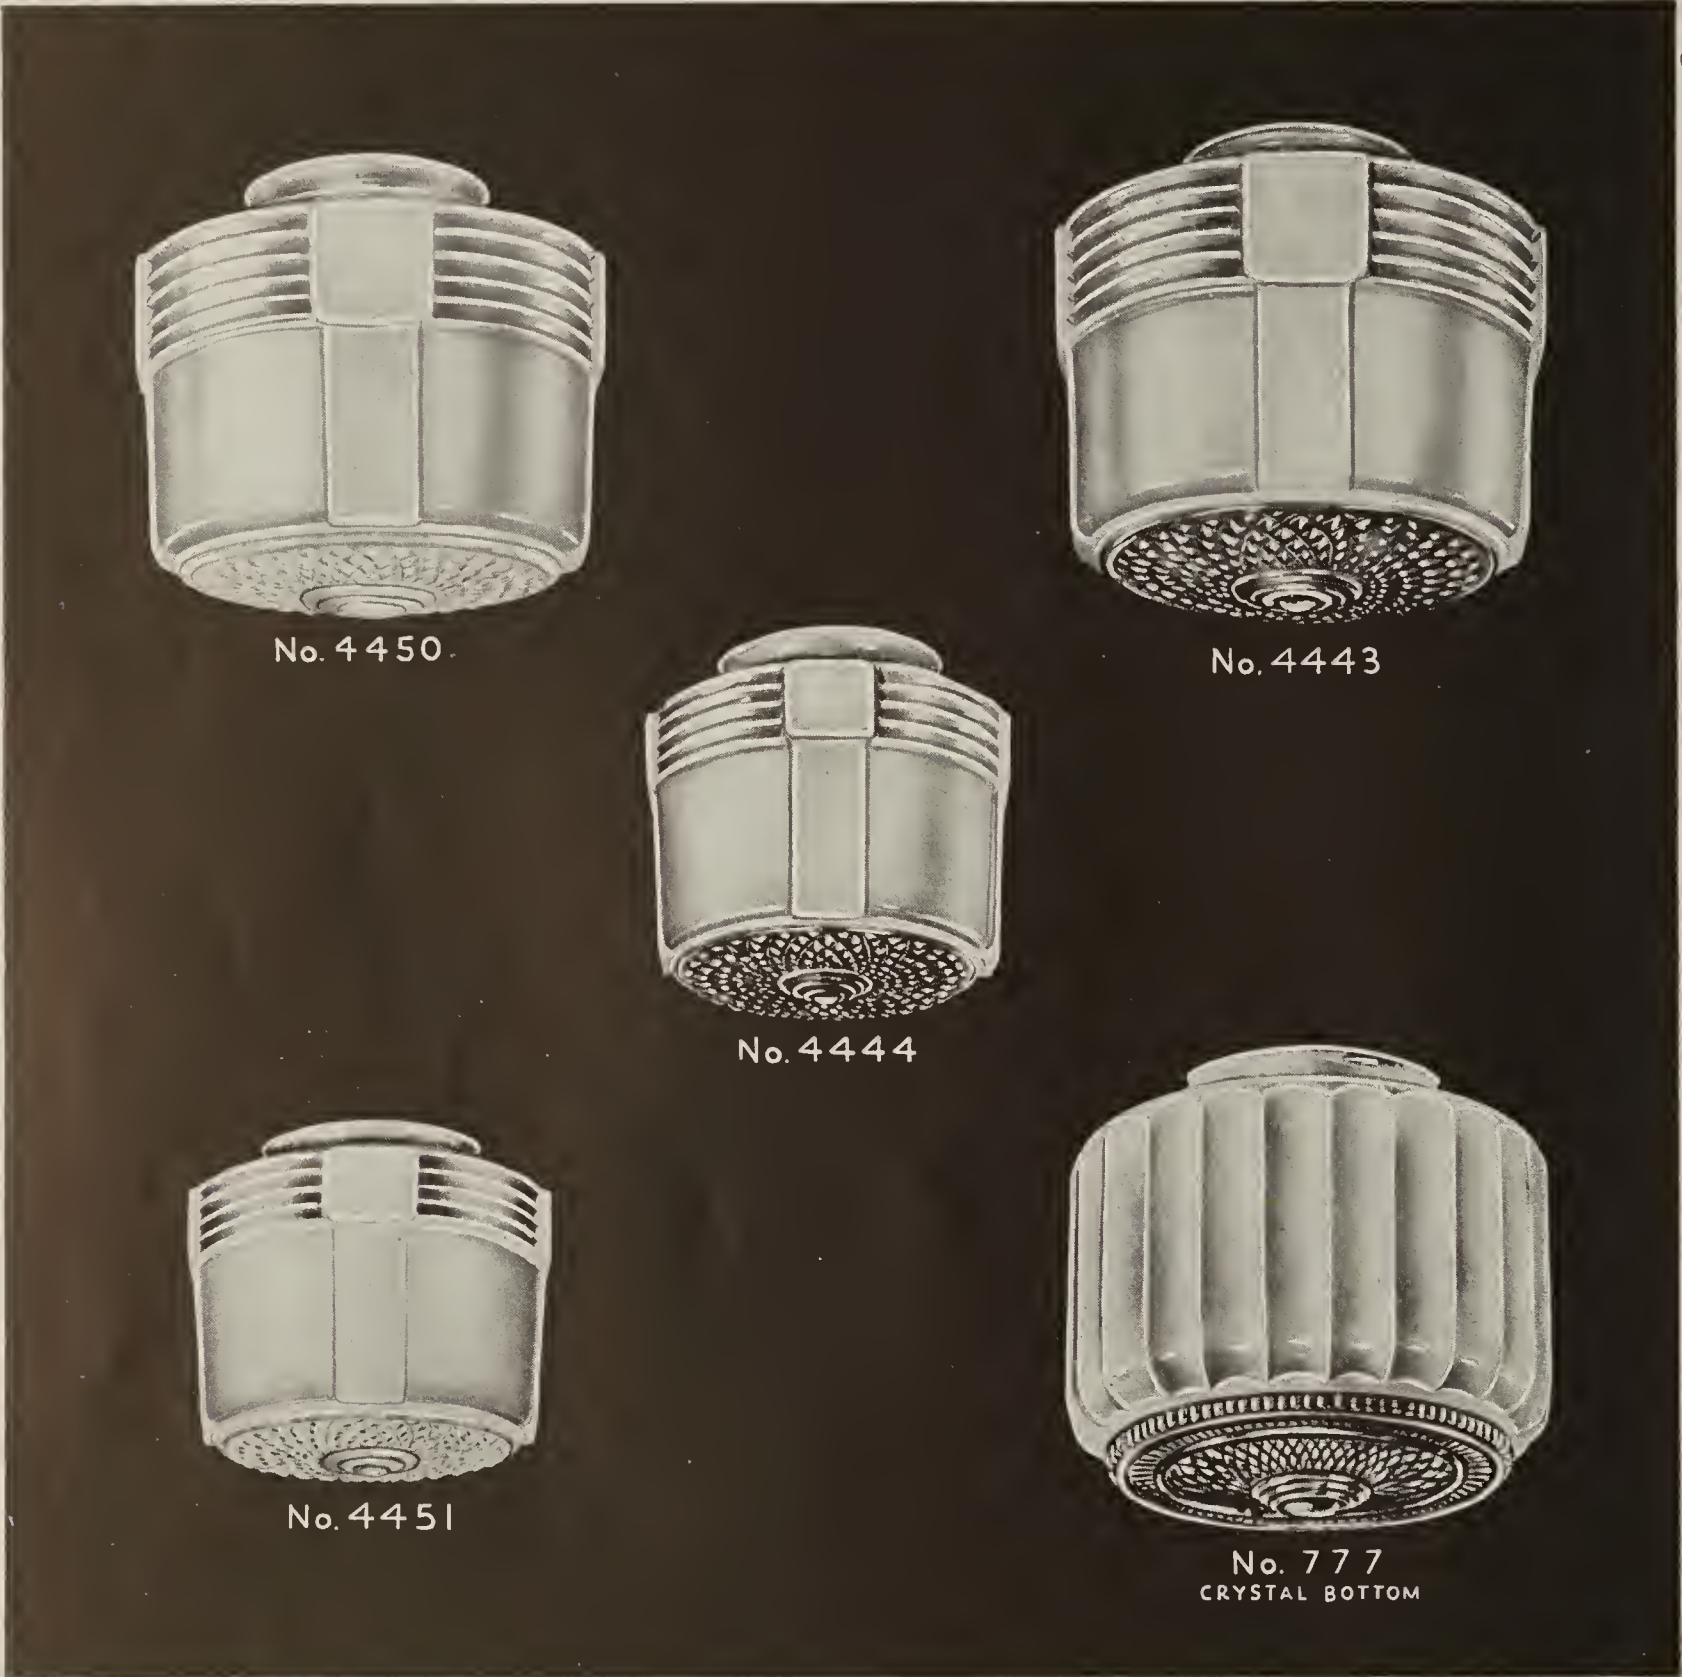

No. 4450 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7⅞"	12	35 lbs.	100

No. 4443 CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	35 lbs.	100

No. 4444 CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6"	12	21 lbs.	60

No. 4451 OPAL

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6"	12	21 lbs.	60

No. 777 CRYSTAL BOTTOM

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	30 lbs.	100

Ivory Decorated Glassware



No. 4450-653



No. 4447-654



No. 4451-653



No. 4448-654

No. 4450-653

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7⅞"	12	35 lbs.	100

No. 4447-654

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7⅞"	12	35 lbs.	100

No. 4451-653

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6"	12	21 lbs.	60

No. 4448-654

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
6⅜"	4"	6"	12	21 lbs.	60

Opal Kitchen Glassware



No. 344

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7 15/16"	12	28 lbs.	100

No. 340

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	7 7/8"	12	30 lbs.	100

No. 466

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
9"	4"	7"	12	28 lbs.	100


No. 1394

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
9"	4"	7½"	12	32 lbs.	100

No. 778

Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
8½"	4"	8"	12	30 lbs.	100

CRYSTAL
BOTTOM
UNITS

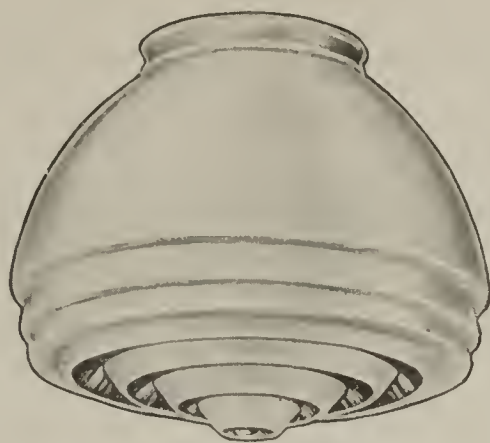

No. 445



No. 444



No. 3188



No. 4000



No. 4442

Designed for MAXIMUM LIGHT EFFICIENCY, with CRYSTAL BOT-
TOMS which give forth an ABUNDANCE of DIFFUSED LIGHT, these
units are ideal for

THE KITCHEN or WORK SHOP
THE SMALL STORE or OFFICE

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton	Suggested Wattage
444	Crystal Bottom	8½"	4"	6⅞"	12	35 lbs.	100
445	Crystal Directional Louvre Effect Bottom	8½"	4"	6⅝"	12	35 lbs.	100
3188	Crystal Bottom	8½"	4"	6⅝"	12	30 lbs.	100
4000	Crystal Bottom	8½"	4"	7⅛"	12	35 lbs.	100
4442	Crystal Bottom	8½"	4"	8"	12	45 lbs.	100

Ivory Decorated Glassware



No. 366-581



No. 16308-583



No. 6915-556



No. 15915½-584

No. 366-581

Diameter	Fitter	Standard Package	Weight Per Carton
8"	2¼"	12	18 lbs.

No. 16308-583

Diameter	Fitter	Standard Package	Weight Per Carton
8½"	4"	12	24 lbs.

No. 6915-556

Diameter	Fitter	Standard Package	Weight Per Carton
4"	2¼"	36	15 lbs.


No. 15915½-584

Diameter	Fitter	Standard Package	Weight Per Carton
7½"	2¼"	12	18 lbs.

Better Light, Better Sight Shades




Cat. No.	Diameter	Fitter	Depth	Std. Pkg.	Weight Per Carton
3306	6 1/4"	2 1/4"	5"	6	15 lbs.
3308	8"	2 1/4"	5 3/8"	6	15 lbs.
3309	9 3/8"	2 5/8"	6 1/2"	6	17 lbs.
3310B	10"	2 5/8" with long shank	6 3/8"	6	18 lbs.
3410	10"	2 7/8" with slotted shank	6 3/8"	6	18 lbs.
3410A	10"	2 7/8" with short shank	5 3/8"	6	18 lbs.
3410B	10"	2 7/8" with long shank	5 3/8"	6	18 lbs.
3410C	10"	2 3/4" with short shank	5 3/8"	6	18 lbs.

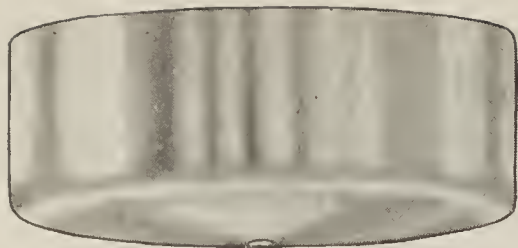


No. 706 6"
No. 708 8"
No. 710 10"
No. 712 12"
No. 714 14"
No. 716 16"

Opal
or
Ivory

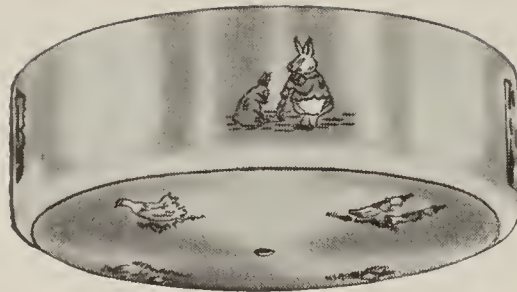

No. 706-779 6"
No. 708-779 8"
No. 710-779 10"

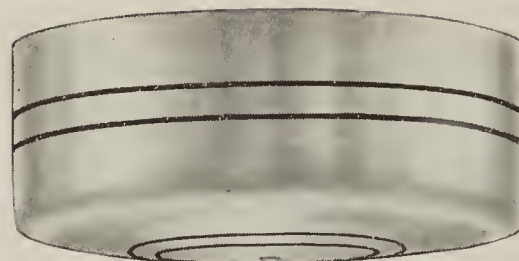


No. 706 6"
No. 708 8"
No. 710 10"
No. 712 12"


Dec. No.
-1-4-6



No. 706-723 6"
No. 708-723 8"
No. 710-723 10"
No. 712-723 12"

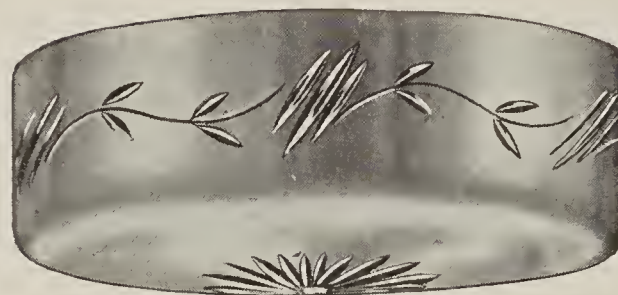

No. 506 6"

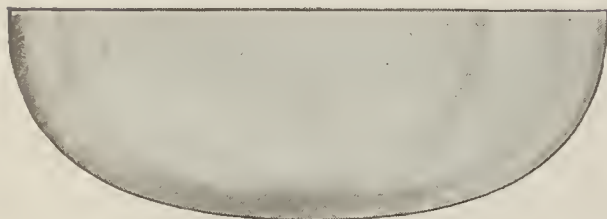

No. 608 8"




No. 808 8" Lip Bowl

COMMERCIAL
and
RESIDENTIAL
GLASSWARE


Catalog No.	Diameter	Depth	Standard Package	Weight Per Carton	Decoration No.	DESCRIPTION OF DECORATIONS
506	6"	3"	36	33 lbs.		Crystal Etched—Cut Glass
508	8"	3¼"	24	30 lbs.		Crystal Etched—Cut Glass
510	10"	3¼"	16	32 lbs.		Crystal Etched—Cut Glass
608	8"	3⅛"	24	34 lbs.		Opal or Ivory
610	10"	3⅞"	16	32 lbs.		Opal or Ivory
612	12"	3⅞"	12	35 lbs.		Opal or Ivory
614	14"	4⅛"	6	28 lbs.		Opal or Ivory
706	6"	3"	36	33 lbs.		
708	8"	3¼"	24	30 lbs.	1	BLACK LINES on OPAL or IVORY Base.
					4	RED LINES on OPAL or IVORY Base.
710	10"	3¼"	16	32 lbs.	6	PLATINUM LINES on OPAL or IVORY Base.
					723	FLORAL DECORATION on IVORY Base.
712	12"	3½"	12	35 lbs.	724	IRIDESCENT, on OPAL or IVORY BASE.
					779	NURSERY DECORATION on OPAL or IVORY BASE.
714	14"	4"	6	28 lbs.		(Also furnished in plain OPAL or IVORY.)
716	16"	4⅛"	2	16 lbs.		
808	8"	4"	24	30 lbs.		OPAL or C. R. I.
810	10"	5"	16	32 lbs.		OPAL or C. R. I.
812	12"	6"	12	35 lbs.		OPAL or C. R. I.

NOTE: Numbers 506, 508 and 510 are furnished with ½" bottom hole. Numbers 608 to 614 inclusive and 706 to 716 inclusive are furnished with 7/16" bottom hole unless otherwise specified.


COMMERCIAL
AND
and
RESIDENTIAL
GLASSWARE

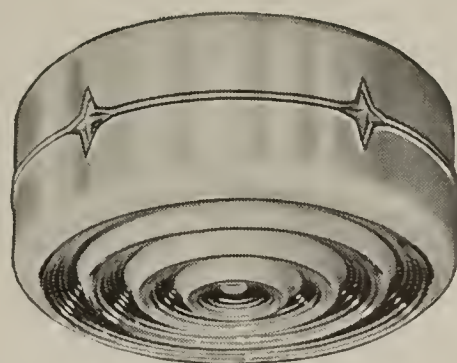

No. 1808



No. 1806

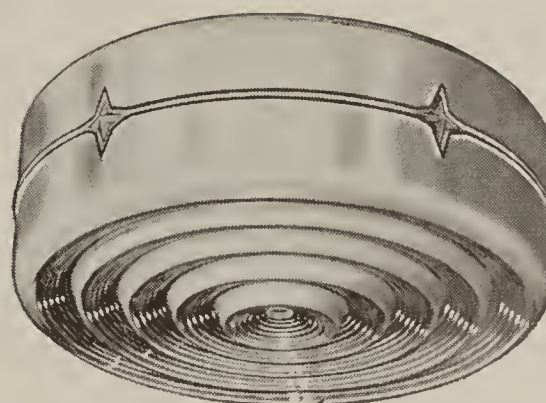


No. 1810


Cat. No.	Description	Diameter	Depth	Standard Package	Weight Per Carton
1806	Crystal, Directional Louvre Effect Bottom with Crystal Rib and Diamond Design	6 $\frac{7}{16}$ "	3 $\frac{5}{8}$ "	12	24 lbs.
1808	Crystal, Directional Louvre Effect Bottom with Crystal Rib and Diamond Design	8 $\frac{3}{8}$ "	3 $\frac{1}{4}$ "	6	20 lbs.
1810	Crystal, Directional Louvre Effect Bottom with Crystal Rib and Diamond Design	10 $\frac{7}{16}$ "	3 $\frac{15}{16}$ "	6	24 lbs.

Numbers 1806, 1808 and 1810 are furnished with $\frac{7}{16}$ " bottom hole for center lock-up, unless otherwise specified.

NOTE: At slight additional charge, numbers 1806, 1808, 1810 and 706, 708, 710 (shown on page 44) can be furnished in insertion cartons ready for your holder. Merely drop holder in space provided and complete unit is ready for shipment.

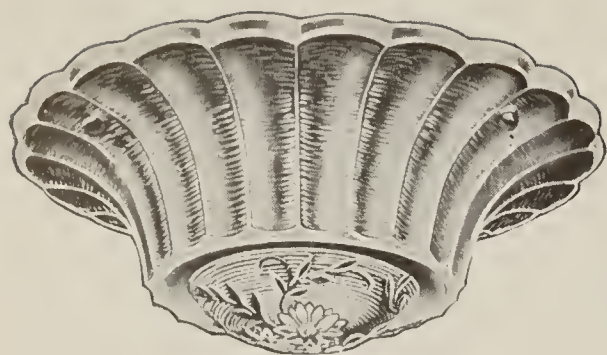

No. 1831

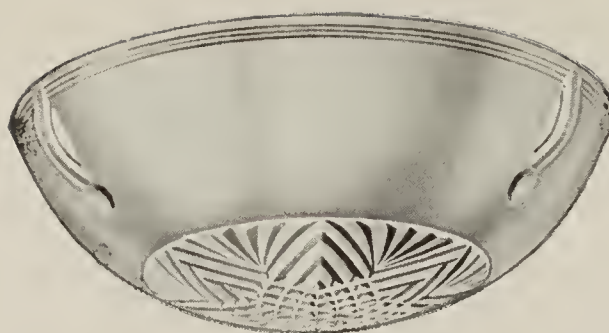

No. 1841

BOWLS
for
SUSPENSION
TYPE
FIXTURES



No. 1851



No. 1821

Four units of proven merit. These numbers continue to gain favor daily. The **DELICATE PASTEL SHADES** of the units create a **SOFT, RESTFUL LIGHT, PLEASANT TO THE EYES**. Recommended for use in

THE BEDROOM
THE DINETTE
THE FOYER


Cat. No.	Description	Diameter	Depth	Standard Package	Weight Per Carton
1821	Crystal Etched or Colors	10½"	4"	6	16 lbs.
1831	Crystal Etched or Colors	10"	3⅝"	6	15 lbs.
1841	Crystal Etched or Colors	10"	3⅛"	12	31 lbs.
1851	Crystal Etched or Colors	10"	4¾"	6	17 lbs.

NOTE: These bowls are all drilled with 3 holes for shot chain and are furnished in **ETCHED CRYSTAL** or **COLORS**. Colors are pastel shades of **ROSE, YELLOW, BEIGE, BLUE, GREEN** or **IVORY**. When ordering please specify **COLOR DESIRED**.



FERLUX
BATHROOM
SHADES





No. 1726 Backview

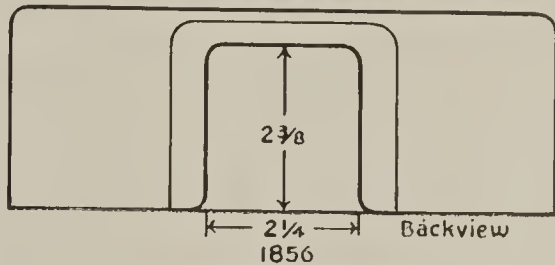


Backview
1856

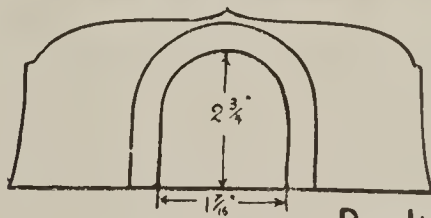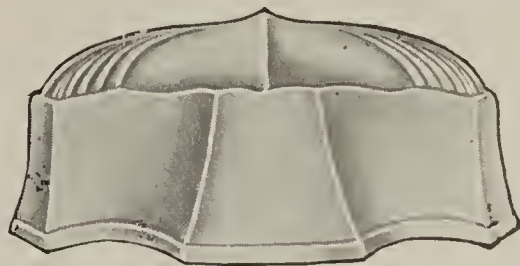



No. 1826 Backview

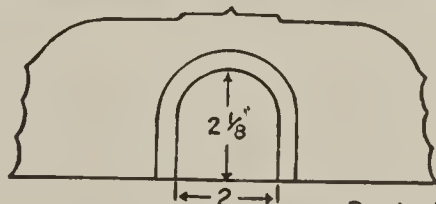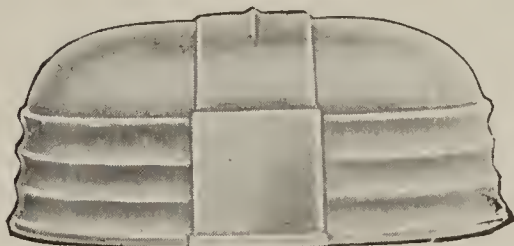


No. 256 Backview




No. 1736 Backview



Backview
1836



No. 1926 Backview

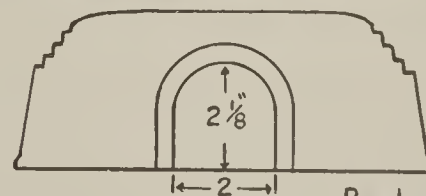

No. 356 Backview

Cat. No.	Length	Width	Depth	Standard Package	Weight Per Cart.
256	7 5/8"	5 1/8"	3 3/8"	24	52 lbs.
356	8"	5 1/8"	3 1/8"	24	52 lbs.
1726	10 9/16"	4 5/16"	3 1/4"	24	58 lbs.
1736	4 3/8"	5 5/8"	3 1/8"	36	45 lbs.


Cat. No.	Length	Width	Depth	Standard Package	Weight Per Cart.
1826	8 1/4"	5 1/2"	3 9/16"	36	62 lbs.
1836	3 5/8"	5 1/4"	3 1/4"	36	45 lbs.
1856	9 1/2"	3 11/16"	3 3/8"	24	58 lbs.
1926	5 7/8"	5 3/4"	3 1/2"	36	45 lbs.



No. 263



No. 62

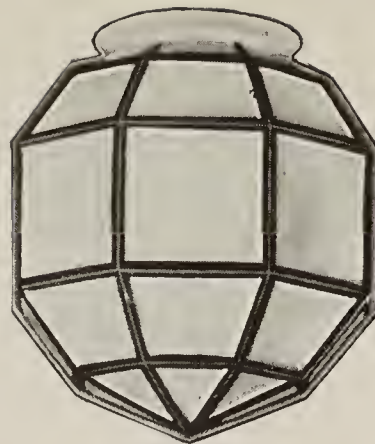

No. 363

MISCELLANE-
OUS
GLASSWARE



No. 3510



No. 736




No. 3508



No. 206



No. 12807

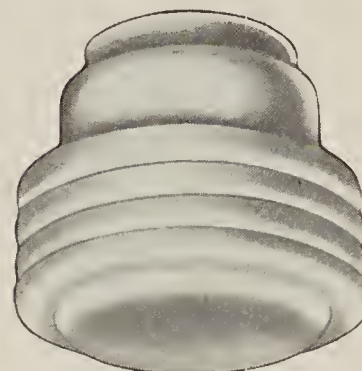

No. 888

Cat. No.	Description	Diameter	Fitter	Depth	Standard Package	Weight Per Carton
62	Opal or Ruby	6"	3 1/4"		12	14 lbs.
64	Opal or Ruby	8"	4"		12	23 lbs.
65	Opal or Ruby	10"	4", 5" or 6"		4	14 lbs.
66	Opal or Ruby	12"	5" or 6"		1	7 lbs.
67	Opal or Ruby	14"	6"		1	8 lbs.
68	Opal or Ruby	16"	6" or 8"		1	14 lbs.
206	Opal	6"	2 1/4"		24	16 lbs.
207	Opal	7"	2 1/4"		24	24 lbs.
208	Opal	8"	2 1/4"		24	25 lbs.
263	Opal	6"	2 1/4"		36	34 lbs.
363	Amber Crackled or C. R. I. with Black or Green Stripes	6"	3 1/4"		36	40 lbs.
736	Opal or Ivory	5 1/8"	1 3/4"		24	20 lbs.
888	Opal	6 7/16"	4"	5 3/8"	12	20 lbs.
3508	Opal Pressed Shade	8"	2 1/4"	5 7/8"	6	11 lbs.
3510	Opal Pressed Shade	10"	2 7/8"	5 1/8"	6	16 lbs.
12807	Opal	7"	2 1/4"		54	59 lbs.
12808	Opal	8"	2 1/4"		30	45 lbs.
12809	Opal	9"	2 1/4"		24	39 lbs.
12810	Opal	10"	2 1/4"		24	57 lbs.

OUTDOOR
GLASSWARE




No. 83-1



No. 42-G




No. 83-G

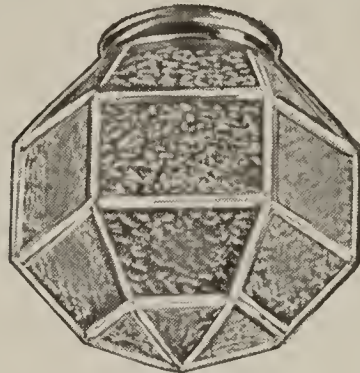


No. 364
No. 365




No. 93-G

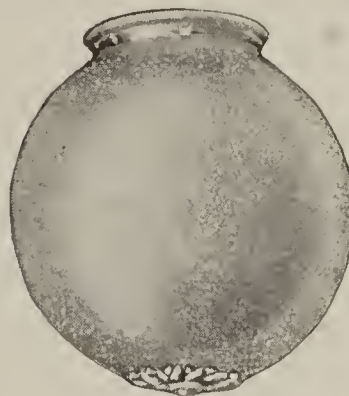

No. 62-G

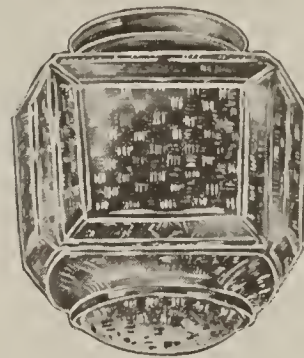


No. 103-G

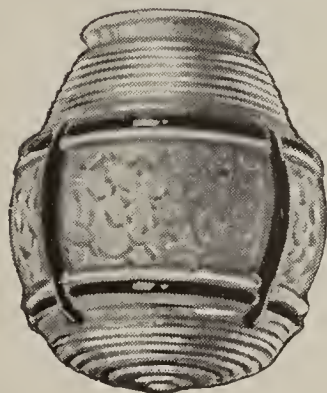

No. 73-1




No. 52-G

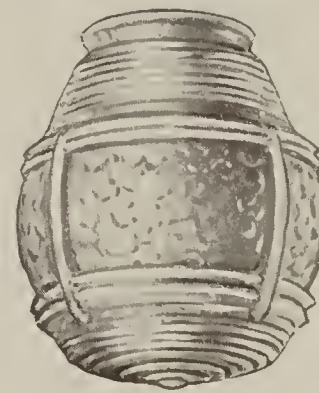


No. 73-G

Cat. No.	Description	Diameter	Fitter	Standard Package	Weight Per Carton
42-G	Crystal	6"	3 1/4"	12	14 lbs.
52-G	Crystal or Amber	6"	3 1/4"	12	18 lbs.
62-G	Crystal or Amber	6"	3 1/4"	12	18 lbs.
73-G	Crystal, Roughed Inside	6"	3 1/4"	12	18 lbs.
73-1	Black Lined	6"	3 1/4"	12	18 lbs.
83-G	Crystal Roughed Inside	6"	3 1/4"	12	19 lbs.
83-1	Black Lined	6"	3 1/4"	12	19 lbs.
93-G	Crystal or Amber	6"	3 1/4"	12	19 lbs.
103-G	Crystal or Amber	6"	3 1/4"	12	19 lbs.
364	Amber	6"	3 1/4"	24	36 lbs.
365	Crystal	6"	3 1/4"	24	36 lbs.


NOTE: Holders shown are only for illustrative purposes and are not furnished by us.

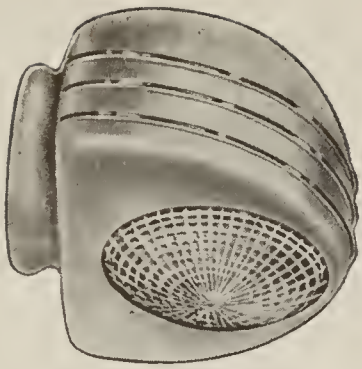

No. 636

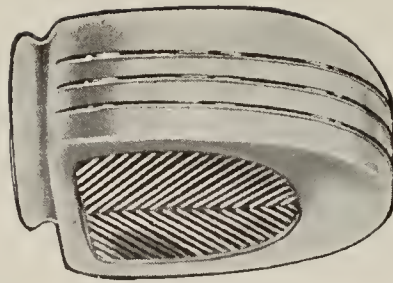


No. 536

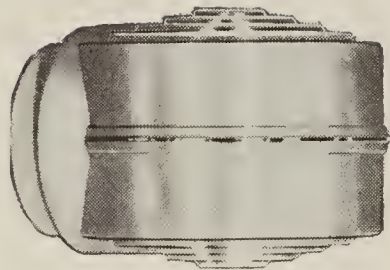


No. 638

**MISCELLANE-
OUS
BATHROOM
SHADES**




No. 746



No. 1646




No. 446



No. 1636



No. 756



No. 1846

Cat. No.	Description	Fitter	Overall Length	Diameter	Width	Height	Standard Package	Weight Per Carton
536	Closed Bottom Half Shade	3 1/4"	6 1/8"		4 1/4"		24	28 lbs.
636	Closed Bottom Half Shade	3 1/4"	5"		6 1/8"		24	32 lbs.
638	Louvre Top and Bottom Shade	3 1/4"	5 7/8"		5 1/8"		24	30 lbs.
446	Upright Shade	1 3/4"		3 3/8"		3 3/8"	60	25 lbs.
746	Upright Shade	1 11/16"		3"		3 1/2"	60	30 lbs.
756	Upright Shade	1 11/16"		3"		3 1/2"	48	20 lbs.
1636	Upright Shade	1 3/4"		3'		3 1/2"	60	40 lbs.
1646	Upright Shade	1 3/4"		3 1/2"		3 7/16"	60	40 lbs.
1846	Upright Shade	1 11/16"		2 7/8"		3 3/8"	60	30 lbs.

**MISCELLANEOUS
BATHROOM
SHADES**



No. 341




No. 796



No. 786




No. 700

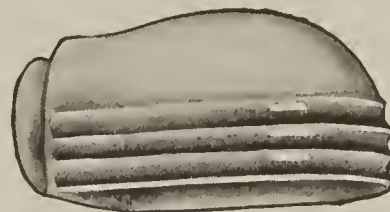

No. 766




No. 2826

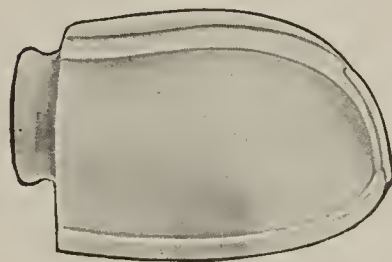


No. 436




No. 436-1

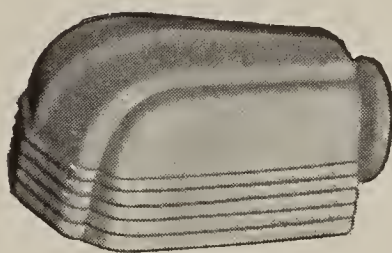

No. 236



No. 9001

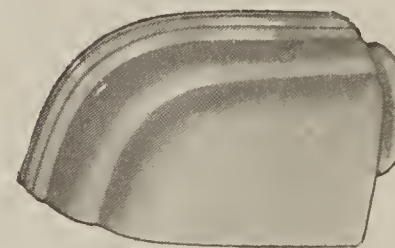

No. 136

Cat. No.	Description	Fitter	Overall Length	Width	Standard Package	Weight Per Carton
136	Half Shade	2 1/4"	5 3/4"	3 15/16"	24	20 lbs.
236	Half Shade	2 1/4"	6 1/8"	4 1/2"	24	20 lbs.
341	Half Shade	2 1/4"	6"	4 1/8"	24	20 lbs.
436	Half Shade	2 1/4"	5 7/8"	4 3/8"	24	24 lbs.
436-1	Half Shade Black Lined	2 1/4"	5 7/8"	4 3/8"	24	24 lbs.
700	Half Shade	2 1/4"	6"	4 3/8"	24	20 lbs.
766	Half Shade	2 1/4"	5 11/16"	3 5/8"	24	20 lbs.
786	Half Shade	2 1/4"	5 3/8"	4 1/4"	24	20 lbs.
796	Half Shade	2 1/4"	5 3/8"	4 1/8"	24	20 lbs.
2826	Half Shade	2 1/4"	5 11/16"	3 5/8"	24	20 lbs.
9001	Half Shade	2 1/4"	5 1/2"	5 1/8"	24	25 lbs.

ERIE GLASS AND MANUFACTURING COMPANY

991 Union Trust Building

PITTSBURGH, PENNSYLVANIA

CHICAGO OFFICE
1422 Merchandise Mart

WEST COAST
SAN FRANCISCO OFFICE
726 Mission Street
LOS ANGELES OFFICE
825 Third Street

NEW YORK OFFICE
200 Fifth Avenue

Information For Ordering

PACKING:

Since all of our units are packed in specially designed cartons, suitable for carrying the glassware safely to destination, all orders should specify standard package quantities.

SHIPPING INSTRUCTIONS

Please specify on all orders whether shipments are to be made via FREIGHT, TRUCK or EXPRESS. We will use our judgment as to the best routing for orders which do not specify shipping instructions.

CLAIMS:

The various transportation companies, when accepting shipments from us, give us a signed receipt as having received the merchandise from us "in good order." When this has been done, our responsibility ends and the transportation company then assumes full responsibility for the shipment. Should any part of a shipment therefore, reach you in a damaged condition or with any part of the original shipment missing, the transportation company expects you to file a claim for the damaged or missing articles. Where damage is not discovered until after the cartons have been opened, a claim should be filed with the transportation company for "Concealed Damage." Our Traffic Department will gladly assist you in the filing of claims but we cannot accept responsibility or guarantee collection.

ERIE GLASS AND MANUFACTURING COMPANY

991 Union Trust Building

PITTSBURGH, PENNSYLVANIA



Information for Ordering (Continued)

RETURNED GOODS

Under no circumstances should merchandise be returned to us without you having first obtained permission in writing from us to make the return. Any merchandise returned to us without our permission, will not be accepted.

TERMS:

All prices shown in this catalogue are

F. O. B. FACTORY

and our TERMS are

1%—10 days, net 30 days

to firms with satisfactory ratings in Dun & Bradstreet. Orders specifying C. O. D. Shipments should be accompanied by a deposit for 25% of the order.

SPECIAL ITEMS

In this catalogue are illustrated only our active "moulds." Numbers appearing in previous catalogues and not shown in this issue have either been discontinued or are special. Quotations for such inactive or special numbers will gladly be furnished upon request. We specialize on private moulds. Send us your drawings for quotations.

This List Supersedes All Previous Price Lists

Numerical Index and Price List

COVERING CATALOGUE No. 40

Prices Subject to Change Without Notice

TERMS: 1-10 Net 30

F. O. B. FACTORY

Catalogue Number	Page	Description	List Price Each	Catalogue Number	Page	Description	List Price Each
42-G	49	Crystal66	344	40	Opal95
52-G	49	Crystal or Amber.....	.42	356	47	Ferlux	Prices on Application
62	48	Opal or C. R. I.....	.66	363	48	Black or Green Lined.....	1.12
62	48	Ruby	1.65	364	49	Amber52
62-G	49	Crystal or Amber.....	.42	365	49	Crystal52
64	48	Opal or C. R. I.....	1.05	366-581	42	Ivory Decorated.....	1.92
64	48	Ruby	2.61	436	51	Half Shade70
65	48	Opal or C. R. I.....	1.90	436-1	51	Opal Decorated90
65	48	Ruby	Prices on Application	444	41	Crystal Bottom	1 26
66	48	Opal or C. R. I.....	3.15	445	41	Crystal Louvre Bottom.....	1.26
66	48	Ruby	Prices on Application	446	50	Upright Shade	Prices on Application
67	48	Opal or C. R. I.....	4.41	466	40	Opal95
67	48	Ruby	Prices on Application	506	44	Cut Glass.....	Prices on Application
68	48	Opal or C. R. I.....	5.98	508	44	Cut Glass.....	Prices on Application
68	48	Ruby	Prices on Application	510	44	Cut Glass.....	Prices on Application
73-G	49	C. R. I.....	.60	512	44	Cut Glass.....	Prices on Application
73-1	49	Black Lined	1.00	514	44	Cut Glass.....	Prices on Application
83-G	49	C. R. I.....	.60	516	44	Cut Glass.....	Prices on Application
83-1	49	Black Lined	1.00	536	50	Crystal Bottom	1.20
93-G	49	Crystal or Amber.....	.42	608	44	Opal	Prices on Application
103-G	49	Crystal or Amber.....	.42	608	44	Ivory	Prices on Application
109	22	Opal95	610	44	Opal	Prices on Application
110	22	Crystal Ribs.....	1.50	610	44	Ivory	Prices on Application
111	22	Opal75	612	44	Opal	Prices on Application
112	22	Crystal Ribs.....	1.11	612	44	Ivory	Prices on Application
120	23	Opal95	614	44	Opal	Prices on Application
121	23	Crystal and Enamel.....	1.50	614	44	Ivory	Prices on Application
122	23	Opal Decorated	1.73	616	44	Opal	Prices on Application
123	23	Opal75	616	44	Ivory	Prices on Application
124	23	Crystal and Enamel.....	1.11	636	50	Crystal Bottom	1.50
125	23	Opal Decorated	1.42	638	50	Crystal Top and Bottom....	Prices on App.
130	24	Opal95	674	24	Opal75
131	24	Crystal Ribs	1.50	700	51	Half Shade60
132	24	Opal Decorated	1.73	706	44	Opal	Prices on Application
136	51	Half Shade70	706	44	Ivory or Decorated..	Prices on Application
206	48	Opal60	708	44	Opal	Prices on Application
207	48	Opal84	708	44	Ivory or Decorated..	Prices on Application
208	48	Opal95	710	44	Opal	Prices on Application
236	51	Half Shade70	710	44	Ivory or Decorated..	Prices on Application
256	47	Ferlux.....	Prices on Application	712	44	Opal	Prices on Application
263	48	Opal63	712	44	Ivory or Decorated..	Prices on Application
300	10	Opal79	714	44	Opal	Prices on Application
300-1	32	Colored Lines.....	1.25	714	44	Ivory or Decorated..	Prices on Application
312	10	Opal	2.20	716	44	Opal	Prices on Application
314	10	Opal	2.91	716	44	Ivory or Decorated..	Prices on Application
316	10	Opal	3.94	736	48	Opal or Ivory.....	Prices on Application
320	10	Opal	1.42	746	50	Upright Shade	Prices on Application
340	40	Opal95	756	50	Upright Shade	Prices on Application
341	51	Half Shade70	766	51	Half Shade70

FOR IVORY GLASS, ADD 10% to List Price of Opal

NUMERICAL INDEX AND PRICE LIST

Catalogue Number	Page	Description	List Price Each	Catalogue Number	Page	Description	List Price Each
777	38	Crystal Bottom	1.50	1706	18	Crystal and Enamel.....	1.45
778	40	Opal95	1707	18	Opal95
786	51	Half Shade70	1708	18	Crystal and Enamel.....	1.77
796	51	Half Shade70	1726	47	Ferlux	Prices on Application
808	44	Opal or C. R. I.....	Prices on Application	1736	47	Ferlux	Prices on Application
810	44	Opal or C. R. I.....	Prices on Application	1806	45	Crystal Louvre Bottom.....	Prices on App.
812	44	Opal or C. R. I.....	Prices on Application	1808	45	Crystal Louvre Bottom.....	Prices on App.
874	24	Opal79	1810	45	Crystal Louvre Bottom.....	Prices on App.
888	48	Opal75	1821	46	Etched Crystal or Colors..	Prices on App.
974	33	Opal	1.58	1826	47	Ferlux	Prices on Application
974-18	33	Opal Decorated	2.52	1831	46	Etched Crystal or Colors..	Prices on App.
1000	33	2-Piece Crystal Bottom.....	2.52	1836	47	Ferlux	Prices on Application
1007	11	Crystal	1.50	1841	46	Etched Crystal or Colors..	Prices on App.
1008	11	Opal95	1846	50	Upright Shade	Prices on Application
1008-756	11	Opal Decorated	1.73	1851	46	Etched Crystal or Colors..	Prices on App.
1009	11	Crystal	1.11	1856	47	Ferlux	Prices on Application
1010	11	Opal75	1926	47	Ferlux	Prices on Application
1010-756	11	Opal Decorated	1.42	2445	28	Crystal Bottom	1.58
1076	33	Opal	5.90	2445	28	With Colored Lines.....	1.90
1076-18	33	Opal Decorated	8.32	2447	28	Opal95
1276	33	Opal	4.00	2447	28	With Colored Lines.....	1.39
1276-18	33	Opal Decorated	5.74	2447-684	28	Ivory Decorated.....	1.73
1394	40	Opal	1.05	2826	51	Half Shade70
1405	18	Opal75	3188	41	Crystal Bottom	1.50
1406	18	Crystal Louvre Bottom.....	1.11	3306	43	Opal63
1406-L	18	With Removable Louvre....	Prices on App.	3308	43	Opal99
1407	18	Opal95	3309	43	Opal	1.38
1408	18	Crystal Louvre Bottom.....	1.50	3310-B	43	Opal	1.58
1408-L	18	With Removable Louvre....	Prices on App.	3410	43	Opal	1.58
1409	21	Crystal Louvre Bottom.....	1.50	3410-A	43	Opal	1.58
1409-L	21	With Removable Louvre....	Prices on App.	3410-B	43	Opal	1.58
1410	21	Opal95	3410-C	43	Opal	1.58
1414	21	Crystal Louvre Bottom.....	4.80	3445	27	Crystal Top.....	1.50
1414-L	21	With Removable Louvre....	Prices on App.	3445	27	With Colored Lines.....	1.90
1415	21	Opal	3.37	3445-L	25	With Removable Louvre....	Prices on App.
1514	19	Crystal Louvre Bottom.....	5.50	3446	26	Crystal Top.....	1.11
1515	19	Opal	3.37	3446	26	With Colored Lines.....	1.55
1608	32	Opal79	3446-L	25	With Removable Louvre....	Prices on App.
1608	32	With Colored Lines.....	1.25	3447	27	Opal95
1609	32	Opal95	3447	27	With Colored Lines.....	1.39
1609	32	With Colored Lines.....	1.50	3447-682	27	Ivory, Decorated	1.73
1610	32	Opal	1.42	3447-L	25	With Removable Louvre....	Prices on App.
1610	32	With Colored Lines.....	2.10	3448	26	Opal75
1612	32	Opal	2.20	3448	26	With Colored Lines.....	1.12
1612	32	With Colored Lines.....	3.64	3448-682	26	Ivory Decorated.....	1.42
1614	32	Opal	2.91	3448-L	25	With Removable Louvre....	Prices on App.
1614	32	With Colored Lines.....	4.98	3449	29	Opal, Open Bottom.....	1.05
1616	32	Opal	3.94	3449	29	With Colored Lines.....	1.32
1616	32	With Colored Lines.....	6.12	3450	29	Crystal Top, Open Bottom.....	1.11
1618	32	Opal	6.62	3450	29	With Colored Lines.....	1.42
1618	32	With Colored Lines.....	10.33	3452	29	Opal, Crystal Bottom.....	1.25
1636	50	Upright Shade	Prices on Application	3452	29	With Colored Lines.....	1.58
1646	50	Upright Shade	Prices on Application	3452-682	29	Ivory Decorated	1.81
1705	18	Opal75	3452-L	25	With Removable Louvre....	Prices on App.
				3508	48	Opal	Prices on Application

FOR IVORY GLASS, ADD 10% to List Price of Opal

NUMERICAL INDEX AND PRICE LIST

Catalogue Number	Page	Description	List Price Each	Catalogue Number	Page	Description	List Price Each
3510	48	OpalPrices on Application		5452-754	37	Ivory Decorated	1.73
4000	41	Crystal Bottom	1.26	5608	32	Opal79
4412	14	Opal	2.52	5608	32	With Colored Lines.....	1.25
4412-674	15	Black Decorated	3.94	5609	32	Opal95
4414	14	Opal	3.37	5609	32	With Colored Lines.....	1.50
4414-674	15	Black Decorated	5.50	5610	32	Opal	1.42
4416	14	Opal	4.38	5612	32	With Colored Lines.....	2.20
4416-674	15	Black Decorated	7.09	5614	32	Opal	2.91
4442	41	Crystal Bottom	1.26	5616	32	Opal	3.94
4443	38	Crystal Bottom	1.50	6445	34	Crystal Top and Bottom.....	1.50
4444	38	Crystal Bottom	1.11	6446	34	Crystal Top and Bottom.....	1.11
4445	17	Crystal Top.....	1.50	6447	34	Opal95
4446	17	Crystal Top.....	1.11	6447	34	With Colored Lines.....	1.38
4447	14	Opal95	6448	34	Opal75
4447-654	39	Ivory Decorated.....	1.73	6448	34	With Colored Lines.....	1.12
4447-674	15	Black Decorated	1.58	6915-556	42	Ivory Decorated79
4448	14	Opal75	9001	7	Half Shade70
4448-654	39	Ivory Decorated.....	1.42	9001-735	6	Black Decorated	1.10
4448-674	15	Black Decorated	1.31	9006	7	Crystal Bottom	1.42
4449	36	Opal	1.05	9006-735	6	Black Decorated	1.90
4449-655	37	Ivory Decorated	1.58	9007	7	Opal83
4450	38	Opal95	9007-735	6	Black Decorated	1.42
4450-653	39	Ivory Decorated	1.73	9009	7	Opal	1.00
4451	38	Opal75	9009-735	6	Black Decorated	1.73
4451-653	39	Ivory Decorated	1.42	9010	7	Opal	1.73
4452	36	Crystal Bottom	1.25	9010-735	6	Black Decorated	3.77
4452-655	37	Ivory Decorated	1.73	9012	3	Opal	2.96
4462	17	Crystal Top.....	3.94	9012-735	4	Black Decorated	4.72
4464	17	Crystal Top.....	5.50	9014	3	Opal	3.81
4466	17	Crystal Top.....	6.46	9014-735	4	Black Decorated	6.30
5445	35	Crystal Top.....	1.50	9016	3	Opal	5.61
5446	35	Crystal Top.....	1.11	9016-735	4	Black Decorated	9.45
5447	35	Opal95	12807	48	Opal79
5447-754	37	Ivory Decorated.....	1.73	12808	48	Opal	1.08
5448	35	Opal75	12809	48	Opal	1.25
5448-754	37	Ivory Decorated	1.42	12810	48	Opal	1.47
5449	36	Opal	1.05	15140	19	Crystal Louvre Bottom.....	5.50
5449-754	37	Ivory Decorated	1.58	15150	19	Opal	3.37
5452	36	Crystal Bottom.....	1.25	15915½D584	42	Ivory Decorated.....	1.25
				16308D583	42	Ivory Decorated.....	1.25



FOR IVORY GLASS, ADD 10% to List Price of Opal

